
## **VEGA S W Duo**

# **CE LK** IK07 IP65 (



### LW7037.519-EN-S-S-700-830-EN-C1

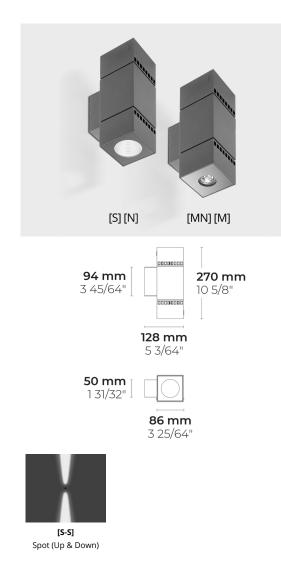

V	′ar	iar	١t

Light distribution Delivered lumens flux	[S-S] 7° 1888 lm
Rated input power	18 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	104 lm/W
Lamp	2 LED
MacAdam Ellipse	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

#### Options

Notes

#### Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum
U	housing
Finishing	Chromate conversion pretreatment followed by
0	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.56 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	2/2 kV
protection	
Power factor	> 0.90
Through wiring	Single cable entry
Operating	-4050°C
temperature	
Cable	0.2 m of flexible cable
Cubic	

Please consult factory for combinations of different light distributions.

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 04.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

Optical accessories



Visor for VEGA S 100708016

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 04.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me				Туре	Quantity	
Date			Note				
LW7037	.519-EN-S	5-S-700-83	30EN	C1			

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[S-S]</b> Spot (Up & Down) - 7°	<b>[700]</b> 18 W	<b>[830]</b> 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black
<b>[N-N]</b> Narrow (Up & Down) - 26°		<b>[827]</b> 2700 K CRI 80	<b>[DALI]</b> DALI	[HM2] Dark grey
<b>[MN-MN]</b> Medium Narrow (Up		[740] 4000 K CRI 70		[HM3] Anthracite grey
& Down) - 42° [ <b>M-M]</b>		<b>[840]</b> 4000 K CRI 80		[HM4] Light grey
Medium (Up & Down) - 60°				[HM5] White
				[HM6] Bronze
				[CC] (Custom colour (Pleas specify RAL code)
Extras	Accessories (To be ordered separately)			
Consult the factory	Optical accessories	-		
<b>[UNI]</b> 120-277V 50/60Hz	<b>[100708016]</b> Visor for VEGA S			
Luminaire body options				
<b>[DPC]</b> Double powder coating				

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 04.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.