
## LW7037.519-EN-S-S-700-830

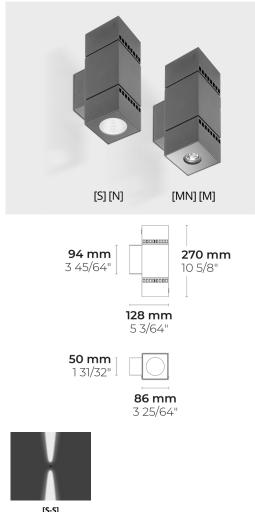

[S-S]
Spot - NEMA Type 0
(Up & Down)

## Configuration

Light distribution	[S-S] 7°
Delivered lumens flux	1888 lm
Rated input power	18 W
Color temperature	3000 K CRI 80
Luminaire efficacy	104 lm/W
Lamp	2 LED
Color Deviation	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

### Options

Notes

### Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum
	housing
Finishing	Chromate conversion pretreatment followed by
	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.56 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	2/2 kV
protection	
Power factor	> 0.90
Through wiring	Single power cord entry
Operating	-4050°C
temperature	
Power cord	8" of flexible power cord

8" of flexible power cord Please consult factory for combinations of different beam spreads.

# Accessories (To be ordered separately)

Optical accessories



Visor for VEGA S 100708016

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 19.05.2024. For current version visit heperlighting.com. All flux ( $\pm$ %7 tolerance) and power values ( $\pm$ %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project na	me			Туре	Quantity		
Date			Note				
LW7037	.519-EN-S	5-S-700-83	30				

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[S-S]</b> Spot - NEMA Type 0 (Up & Down) - 7°	<b>[700]</b> 18 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	[HM1] Black
[N-N] Narrow - NEMA Type		<b>[827]</b> 2700 K CRI 80	<b>[DALI]</b> DALI	[HM2] Dark gray
2 (Up & Down) - 26° [ <b>MN-MN</b> ]		<b>[740]</b> 4000 K CRI 70		[HM3] Anthracite gray
Medium Narrow (Up & Down) - 42°		<b>[840]</b> 4000 K CRI 80		[HM4] Light gray
<b>[M-M]</b> Medium (Up & Down) - 60°				[HM5] White
				[HM6] Bronze
				[CC] (Section Color (Please specify RAL code)
Extras	Accessories ( <i>To be</i> ordered separately)			
Consult the factory	Optical accessories			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[100708016]</b> Visor for VEGA S			
Luminaire body options				
<b>[DPC]</b> Double powder coating				