
VEGA S W Duo

IK07 IP65



LW7037.519-US-M-M-700-740-UNI-C1



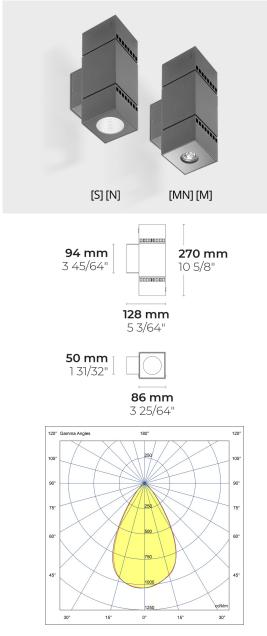

Medium (Up & Down)

Variant

Light distribution	[M-M] 60°
Delivered lumens flux	1463 lm
Rated input power	18 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	73 lm/W
Lamp	2 LED
MacAdam Ellipse	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

Options

Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum
-	housing
Finishing	Chromate conversion pretreatment followed by
	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	5.6 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	2/2 kV
protection	
Power factor	> 0.90
Through wiring	Single cable entry
Operating	-4050°C
temperature	
Cable	0.2 m of flexible cable
Notes	Please consult factory for combinations of

Please consult factory for combinations of different light distributions.

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 20.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Optical accessories



Visor for VEGA S 100708016

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 20.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me				Туре	Quantity	
Date			Note				
LW7037	.519-US-N	M-M-700-	740U	NI-C1			

Light distribution	Rated input power	Colour temperature	Control	Product colours
[M-M] Medium (Up & Down) - 60°	[700] 18 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black
[S-S] Spot (Up & Down) - 7°		[827] 2700 K CRI 80	[0-10V] 0-10V	[HM2] Dark grey
[N-N] Narrow (Up & Down) -		[830] 3000 K CRI 80		[HM3] Anthracite grey
26° [MN-MN]		[840] 4000 K CRI 80		[HM4] Light grey
Medium Narrow (Up & Down) - 42°				[HM5] White
				[HM6] Bronze
				[CC] Custom colour (Plea specify RAL code)
Extras	Accessories (<i>To be</i> ordered separately)			
Luminaire body	Optical accessories			
options [DPC] Double powder coating	- [100708016] Visor for VEGA S			

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 20.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.