
VEGA S W Duo

LW7037.519-US-M-M-700-840





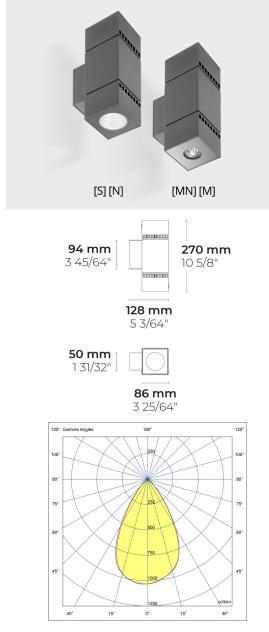

Medium (Up & Down)

Configuration

Light distribution	[M-M] 60°
Delivered lumens flux	1368 lm
Rated input power	18 W
Color temperature	4000 K CRI 80
Luminaire efficacy	68 lm/W
Lamp	2 LED
Color Deviation	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Notes

Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum
	housing
Finishing	Chromate conversion pretreatment followed by
	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	5.6 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	2/2 kV
protection	
Power factor	> 0.90
Through wiring	Single power cord entry
Operating	-4050°C
temperature	
Power cord	8" of flexible power cord

8" of flexible power cord Please consult factory for combinations of different beam spreads.

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 14.05.2024. For current version visit heperlighting.com. All flux (\pm %7 tolerance) and power values (\pm %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Optical accessories



Visor for VEGA S 100708016

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 14.05.2024. For current version visit heperlighting.com. All flux (\pm %7 tolerance) and power values (\pm %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project na	me			Туре	Quantity
Date			Note		
LW7037	.519-US-N	И-М-700-	840		

Light distribution	Rated input power	Color temperature	Control	Product colors
[M-M] Medium (Up & Down) - 60°	[700] 18 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[HM1] Black
[S-S] Spot - NEMA Type 0 (Up & Down) - 7° [N-N]		[827] 2700 K CRI 80	[0-10V] 0-10V	[HM2] Dark gray
		[830] 3000 K CRI 80		[HM3] Anthracite gray
Narrow - NEMA Type 2 (Up & Down) - 26°		[740] 4000 K CRI 70		[HM4] Light gray
[MN-MN] Medium Narrow (Up & Down) - 42°				[HM5] White
/				[HM6] Bronze
				[CC] Custom color (Plea specify RAL code)
Extras	Accessories (<i>To be</i> ordered separately)			
Luminaire body	Optical accessories	_		
options [DPC] Double powder coating	- [100708016] Visor for VEGA S			