
VEGA S W Duo

LW7037.519-US-N-N-700-830





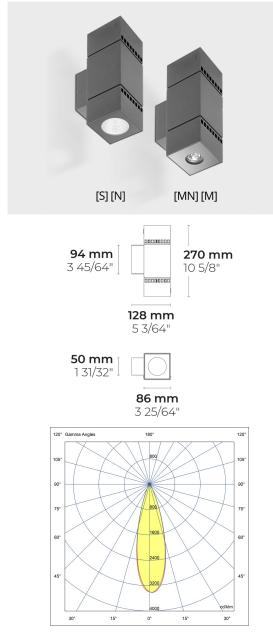

Narrow - NEMA Type 2 (Up & Down)

Configuration

| Light distribution | [N-N] 26° |
|-----------------------|---------------|
| Delivered lumens flux | 1698 lm |
| Rated input power | 18 W |
| Color temperature | 3000 K CRI 80 |
| Luminaire efficacy | 84 lm/W |
| Lamp | 2 LED |
| Color Deviation | 5 SDCM |
| BUG rating | B1-U0-G0 |
| Lifetime L90 (hour) | >72,600 |
| Lifetime L80 (hour) | >72,600 |

Options

Notes

Technical information

| Mounting | Wall mountable |
|--------------------|---|
| Housing | Corrosion resistant, marine grade aluminum |
| | housing |
| Finishing | Chromate conversion pretreatment followed by |
| | electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | High reflectance aluminium coating [S] [N], |
| | PMMA lens with high optical efficiency [MN] [M] |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK07 |
| Ingress protection | IP65 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 5.6 lbs |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge | 2/2 kV |
| protection | |
| Power factor | > 0.90 |
| Through wiring | Single power cord entry |
| Operating | -4050°C |
| temperature | |
| Power cord | 8" of flexible power cord |

8" of flexible power cord Please consult factory for combinations of different beam spreads.

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 05.05.2024. For current version visit heperlighting.com. All flux (\pm %7 tolerance) and power values (\pm %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Optical accessories



Visor for VEGA S 100708016

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 05.05.2024. For current version visit heperlighting.com. All flux (\pm %7 tolerance) and power values (\pm %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

| Project na | me | | | Туре | Quantity | - |
|------------|-----------|-----------|------|------|----------|---|
| Date | | | Note | | | |
| LW7037 | .519-US-N | N-N-700-8 | 30 | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|---|---|--|-------------------------|--|
| [N-N] Narrow - NEMA Type 2 (Up & Down) - 26° | [700] 18 W | [830] 3000 K CRI 80 | [ONOFF] On/Off | [HM1] Black |
| [S-S] Spot - NEMA Type 0 (Up & Down) - 7° [MN-MN] Medium Narrow (Up & Down) - 42° [M-M] Medium (Up & Down) - 60° | | [827] 2700 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80 | [0-10V] 0-10V | [HM2] Dark gray[HM3] Anthracite gray[HM4] Light gray[HM5] White[HM6] Bronze[CC] Custom color (Pleat specify RAL code) |
| Extras | Accessories (<i>To be</i> ordered separately) | | | |
| Luminaire body | Optical accessories | | | |
| options [DPC] Double powder coating | - [100708016] Visor for VEGA S | | | |