


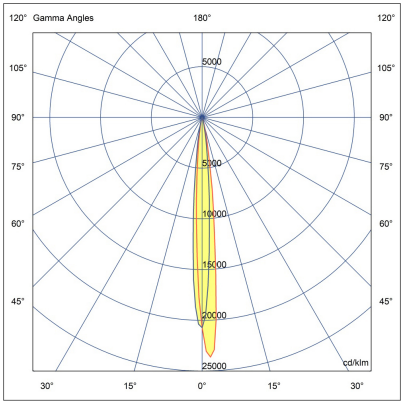


VEGA S W Duo

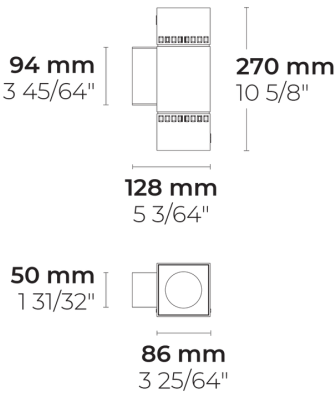

LW7037.519-US-S-S-700-840

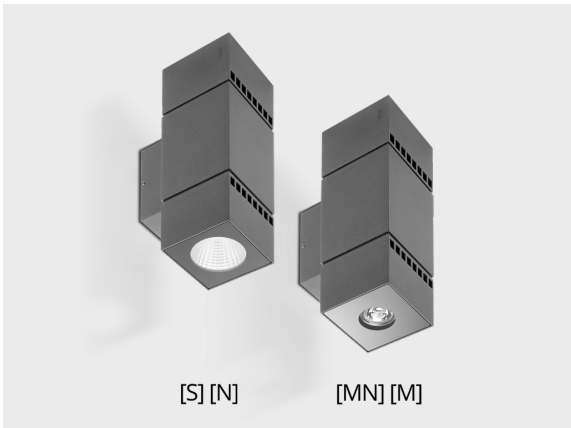

[S-S]

Spot - NEMA Type 0
(Up & Down)

HEPER USA LLC
W227 N546 Westmound Drive Waukesha, 53186
Wisconsin, United States
+1 312 910 9740
infoUS@hepergroup.com

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [S-S] 7° |
| Delivered lumens flux | 1906 lm |
| Rated input power | 18 W |
| Color temperature | 4000 K CRI 80 |
| Luminaire efficacy | 105 lm/W |
| Lamp | 2 LED |
| Color Deviation | 5 SDCM |
| BUG rating | B1-U1-G0 |
| Lifetime L90 (hour) | >72,600 |
| Lifetime L80 (hour) | >72,600 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Wall mountable |
| Housing | Corrosion resistant, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M] |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK07 |
| Ingress protection | IP65 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 5.6 lbs |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 2/2 kV |
| Power factor | > 0.90 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 8" of flexible power cord |
| Notes | Please consult factory for combinations of different beam spreads. |

We reserve the right to change specifications without prior written notice. Edition: 12.05.2024. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Optical accessories










Visor for VEGA S

100708016

| | | | | | | | |
|--------------|--|------|--|------|--|----------|--|
| Project name | | | | Type | | Quantity | |
| Date | | Note | | | | | |

LW7037.519-US-S-S-700-840-__-__-__

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|---|--|-------------------------------|--------------------------|---|
| [S-S] Spot - NEMA Type 0 (Up & Down) - 7° | [700] 18 W | [840] 4000 K CRI 80 | [ONOFF] On/Off | [HM1]  Black |
| [N-N] Narrow - NEMA Type 2 (Up & Down) - 26° | | [827] 2700 K CRI 80 | [0-10V] 0-10V | [HM2]  Dark gray |
| [MN-MN] Medium Narrow (Up & Down) - 42° | | [830] 3000 K CRI 80 | | [HM3]  Anthracite gray |
| [M-M] Medium (Up & Down) - 60° | | [740] 4000 K CRI 70 | | [HM4]  Light gray |
| | | | | [HM5]  White |
| | | | | [HM6]  Bronze |
| | | | | [CC]  Custom color (Please specify RAL code) |
| Extras | Accessories (<i>To be ordered separately</i>) | | | |
| Luminaire body options | Optical accessories | | | |
| [DPC] Double powder coating | [100708016] Visor for VEGA S | | | |