
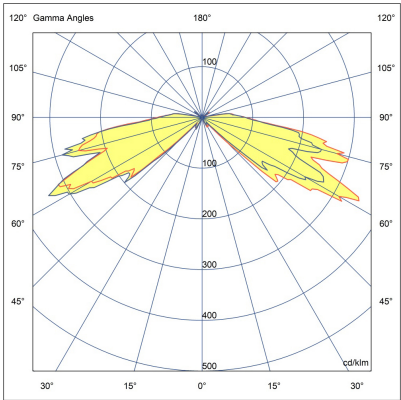


LB7032.693-US-SYM-3L-700-827

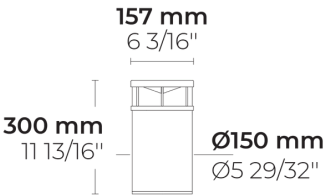

[SYM-3L]  
Symmetric, Special  
effect: 3 lines

### Configuration

Light distribution	[SYM-3L] 165°
Delivered lumens flux	444 lm
Rated input power	10 W
Color temperature	2700 K CRI 80
Luminaire efficacy	44 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
BUG rating	B1-U2-G1
ULOR	3.5
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600


### Options

### Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	5.5 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	4/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

# Accessories (To be ordered separately)








## Anchor bolts



612J014

612J014

Project name					Type		Quantity	
Date			Note					
LB7032.693-US-SYM-3L-700-827-__-__-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SYM-3L]</b> Symmetric, Special effect: 3 lines - 165°	<b>[700]</b> 10 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off  <b>[0-10V]</b> 0-10V	<b>[HM1]</b> Black 
		<b>[830]</b> 3000 K CRI 80		<b>[HM2]</b> Dark gray 
		<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b> Anthracite gray 
		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b> Light gray 
				<b>[HM5]</b> White 
				<b>[HM6]</b> Bronze 
				<b>[CC]</b> Custom color (Please specify RAL code) 
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
<b>[H0.30]</b> 0.9'	Luminaire body options	Anchor bolts		
	<b>[DPC]</b> Double powder coating	<b>[612J014]</b> 612J014		
<b>[HC]</b>				