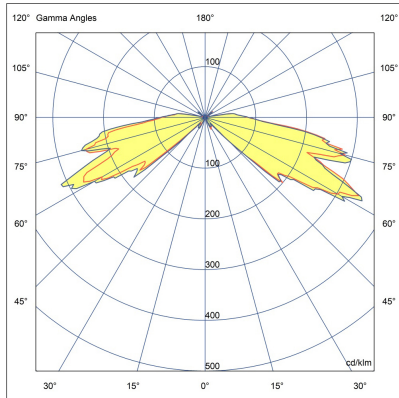



LW7032.693-EN-SYM-3L-700-840-ONOFF-EN-C1

**[SYM-3L]**

Symmetric, Special effect: 3 lines

Variant

Light distribution	[SYM-3L] 165°
Delivered lumens flux	506 lm
Rated input power	10 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	50 lm/W
Lamp	1 LED
MacAdam Ellipse	5 SDCM
BUG rating	B1-U2-G1
ULOR	3.5
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

Options**Technical information**

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK05
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	N/A
Weight	2.2 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.2 m of flexible cable

Project name		Type		Quantity	
Date		Note			
LW7032.693-EN-SYM-3L-700-840-ONOFF-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM-3L] Symmetric, Special effect: 3 lines - 165°	[700] 10 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[HM1] Black 
		[827] 2700 K CRI 80		[HM2] Dark grey 
		[830] 3000 K CRI 80		[HM3] Anthracite grey 
		[740] 4000 K CRI 70		[HM4] Light grey 
				[HM5] White 
				[HM6] Bronze 
				[CC]  Custom colour (Please specify RAL code)
Extras				
Consult the factory				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				