
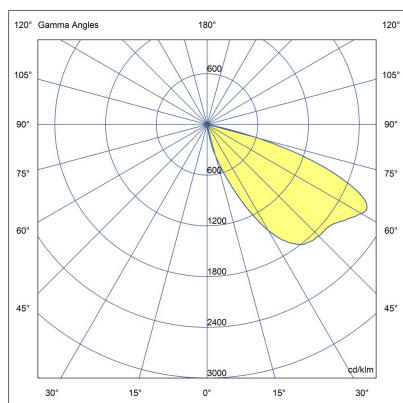


LB6020.546-EN-SLFB-350-827-ONOFF

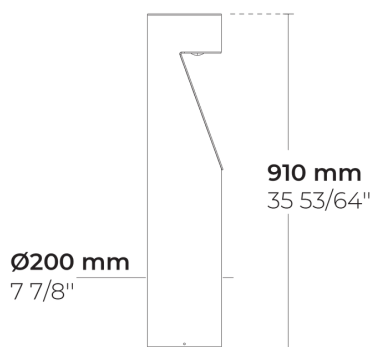

**[SLFB]**  
Special linear,  
Forward throw

## Configuration

<b>Light distribution</b>	[SLFB] 120x47°
<b>Delivered lumens flux</b>	138 lm
<b>Rated input power</b>	4 W
<b>Color temperature</b>	2700 K CRI 80
<b>Luminaire efficacy</b>	34 lm/W
<b>Lamp</b>	2 LED
<b>Color Deviation</b>	3 SDCM
<b>BUG rating</b>	B0-U0-G0
<b>Lifetime L90 (hour)</b>	>102,000
<b>Lifetime L80 (hour)</b>	>102,000


## Options

## Technical information

<b>Mounting</b>	Surface mountable
<b>Housing</b>	Corrosion resistant, extruded, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Lens / Reflector</b>	High reflectance aluminium coating, multifaceted micro reflector
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK05
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	8.6 kg
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	1/1 kV
<b>Power factor</b>	> 0.60
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	20" of outdoor use rated flexible power cord

# Accessories (To be ordered separately)








## Anchor bolts



623J014

623J014

Project name				Type		Quantity	
Date		Note					
LB6020.546-EN-SLFB-350-827-ONOFF-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[SLFB] Special linear, Forward throw - 120x47°	[350] 4 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1] Black 
		[830] 3000 K CRI 80		[HM2] Dark gray 
		[740] 4000 K CRI 70		[HM3] Anthracite gray 
		[840] 4000 K CRI 80		[HM4] Light gray 
				[HM5] White 
				[HM6] Bronze 
				[CC]  Custom color (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
[H0.90] 2.9'  [HC]	Consult the factory	Anchor bolts		
	[UNI] 120-277V 50/60Hz	[623J014] 623J014		
	Luminaire body options			
	[DPC] Double powder coating			