



LB6020.546-US-SLFB-350-827-ONOFF-UNI-C1





Variant

|                        |                |
|------------------------|----------------|
| Light distribution     | [SLFB] 120x47° |
| Delivered lumens flux  | 138 lm         |
| Rated input power      | 4 W            |
| Colour temperature     | 2700 K CRI 80  |
| Luminaire efficacy     | 34 lm/W        |
| Lamp                   | 2 LED          |
| MacAdam Ellipse        | 3 SDCM         |
| BUG rating             | B0-U0-G0       |
| Lifetime L90B50 (hour) | >102,000       |
| Lifetime L80B50 (hour) | >102,000       |

Options

Technical information

|                         |   |
|-------------------------|---|
| Housing                 | Corrosion resistant, extruded, marine grade aluminum housing              |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector          |
| Glass / Diffusor        | Tempered safety glass   |
| Impact protection       | IK05  |
| Ingress protection      | IP65  |
| Input voltage           | 120-277V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 18.7 lbs  |
| LED module              | High power LEDs on metal-core PCB   |
| Driver                  | Internal LED driver   |
| Driver surge protection | 3/3 kV  |
| Power factor            | > 0.40  |
| Through wiring          | Single cable entry  |
| Operating temperature   | -40...50°C  |
| Cable                   | 0.5 m of flexible cable   |

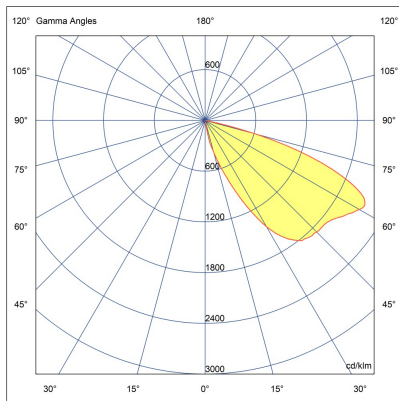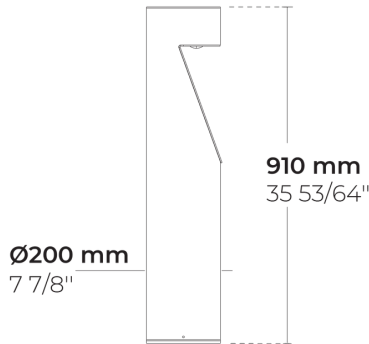


[SLFB]

Special linear,  
Forward throw

## Accessories (To be ordered separately)

---








### Anchorage



623J014

623J014

|  |  |      |  |          |  |
|--|--|------|--|----------|--|
| Project name                               |  | Type |  | Quantity |  |
| Date                                       |  | Note |  |          |  |
| LB6020.546-US-SLFB-350-827-ONOFF-UNI-C1-__ |  |      |  |          |  |

| Light distribution                                      | Rated input power | Colour temperature     | Control           | Product colours  |
|---|-------------------|------------------------|-------------------|--|
| [SLFB]<br>Special linear,<br>Forward throw -<br>120x47° | [350]<br>4 W      | [827]<br>2700 K CRI 80 | [ONOFF]<br>On/Off | [HM1]<br>Black                                      |
|   |                   | [830]<br>3000 K CRI 80 |                   | [HM2]<br>Dark grey                                  |
|   |                   | [740]<br>4000 K CRI 70 |                   | [HM3]<br>Anthracite grey                            |
|   |                   | [840]<br>4000 K CRI 80 |                   | [HM4]<br>Light grey                                 |
|   |                   |                        |                   | [HM5]<br>White                                      |
|   |                   |                        |                   | [HM6]<br>Bronze                                     |
|   |                   |                        |                   | [CC] <br>Custom colour (Please<br>specify RAL code) |
| Accessories ( <i>To be<br/>ordered separately</i> )     |                   |                        |                   |  |
| Anchorages  |                   |                        |                   |  |
| [623J014]<br>623J014                                    |                   |                        |                   |  |