



LB6020.546-US-SLFB-350-827-ONOFF

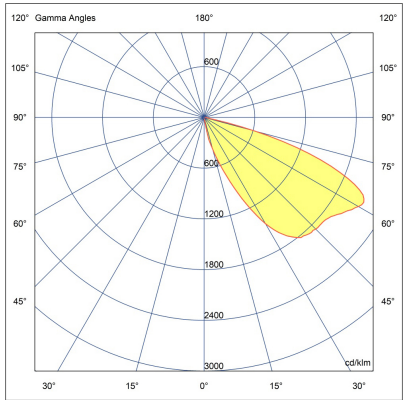

PHASED-  
 OUT

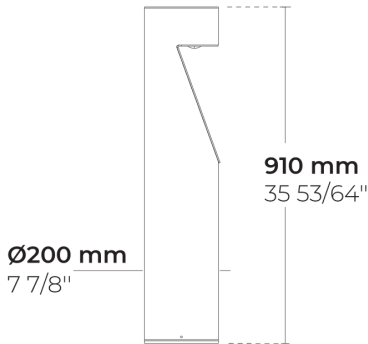

[SLFB]  
 Special linear,  
 Forward throw

Configuration

Light distribution	[SLFB] 120x47°
Delivered lumens flux	138 lm
Rated input power	4 W
Color temperature	2700 K CRI 80
Luminaire efficacy	34 lm/W
Lamp	2 LED
Color Deviation	3 SDCM
BUG rating	B0-U0-G0
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000


Options

Technical information

Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	18.7 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

# Accessories (To be ordered separately)








## Anchor bolts



623J014

623J014

Project name					Type		Quantity	
Date			Note					
LB6020.546-US-SLFB-350-827-ONOFF-__								

Light distribution	Rated input power	Color temperature	Control	Product colors	
<b>[SLFB]</b> Special linear, Forward throw - 120x47°	<b>[350]</b> 4 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black	
		<b>[830]</b> 3000 K CRI 80		<b>[HM2]</b> Dark gray	
		<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b> Anthracite gray	
		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b> Light gray	
				<b>[HM5]</b> White	
				<b>[HM6]</b> Bronze	
				<b>[CC]</b> Custom color (Please specify RAL code)	
<b>Accessories (<i>To be ordered separately</i>)</b>					
<b>Anchor bolts</b>					
<b>[623J014]</b> 623J014					