




LB6020.546-US-SLFB-350-840-ONOFF

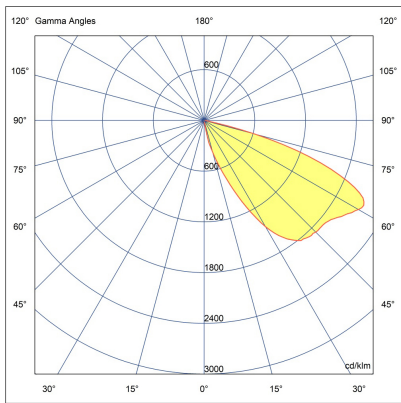

PHASED-  
 OUT

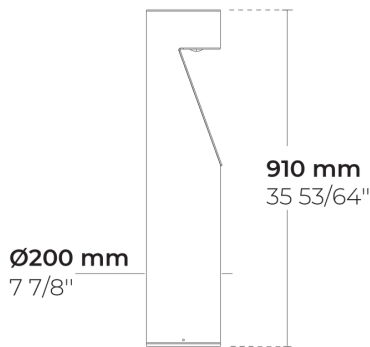

[SLFB]  
 Special linear,  
 Forward throw

Configuration

|                       |                |
|-----------------------|----------------|
| Light distribution    | [SLFB] 120x47° |
| Delivered lumens flux | 138 lm         |
| Rated input power     | 4 W            |
| Color temperature     | 4000 K CRI 80  |
| Luminaire efficacy    | 34 lm/W        |
| Lamp                  | 2 LED          |
| Color Deviation       | 4 SDCM         |
| BUG rating            | B0-U0-G0       |
| Lifetime L90 (hour)   | >102,000       |
| Lifetime L80 (hour)   | >102,000       |


Options

Technical information

|                         |   |
|-------------------------|---|
| Housing                 | Corrosion resistant, extruded, marine grade aluminum housing              |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector          |
| Glass / Diffusor        | Tempered safety glass   |
| Impact protection       | IK05  |
| Ingress protection      | IP65  |
| Input voltage           | 120-277V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 18.7 lbs  |
| LED module              | High power LEDs on metal-core PCB   |
| Driver                  | Internal LED driver   |
| Driver surge protection | 3/3 kV  |
| Power factor            | > 0.40  |
| Through wiring          | Single power cord entry   |
| Operating temperature   | -40...50°C  |
| Power cord              | 20" of outdoor use rated flexible power cord                              |

# Accessories (To be ordered separately)








## Anchor bolts



623J014

623J014

|                                     |  |  |      |  |      |  |          |  |
|-------------------------------------|--|--|------|--|------|--|----------|--|
| Project name                        |  |  |      |  | Type |  | Quantity |  |
| Date                                |  |  | Note |  |      |  |          |  |
| LB6020.546-US-SLFB-350-840-ONOFF-__ |  |  |      |  |      |  |          |  |

| Light distribution   | Rated input power   | Color temperature             | Control                  | Product colors   |   |
|--|---------------------|-------------------------------|--------------------------|--|---|
| <b>[SLFB]</b><br>Special linear,<br>Forward throw -<br>120x47° | <b>[350]</b><br>4 W | <b>[840]</b><br>4000 K CRI 80 | <b>[ONOFF]</b><br>On/Off | <b>[HM1]</b><br>Black                                    |  |
|  |                     | <b>[827]</b><br>2700 K CRI 80 |                          | <b>[HM2]</b><br>Dark gray                                |  |
|  |                     | <b>[830]</b><br>3000 K CRI 80 |                          | <b>[HM3]</b><br>Anthracite gray                          |  |
|  |                     | <b>[740]</b><br>4000 K CRI 70 |                          | <b>[HM4]</b><br>Light gray                               |  |
|  |                     |                               |                          | <b>[HM5]</b><br>White                                    |  |
|  |                     |                               |                          | <b>[HM6]</b><br>Bronze                                   |  |
|  |                     |                               |                          | <b>[CC]</b><br>Custom color (Please<br>specify RAL code) |  |
| <b>Accessories (<i>To be<br/>ordered separately</i>)</b>       |                     |                               |                          |  |   |
| <b>Anchor bolts</b>  |                     |                               |                          |  |   |
| <b>[623J014]</b><br>623J014                                    |                     |                               |                          |  |   |