



ZETA 12 Dyno

CE UK CA IK08 IP67

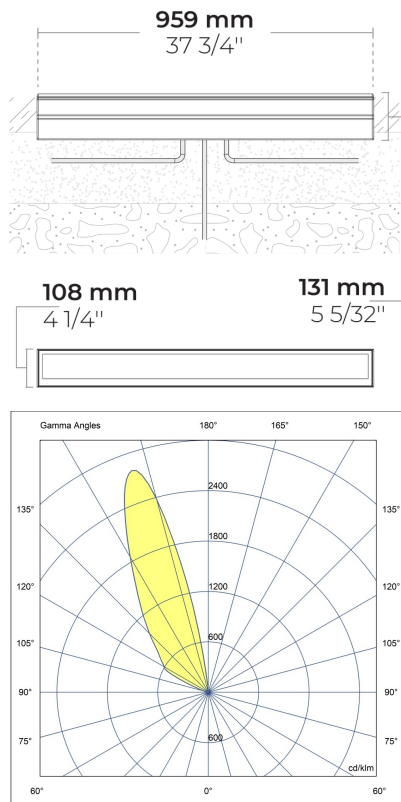

LR9012.584-EN-WW-350-840-EN-C1-SS

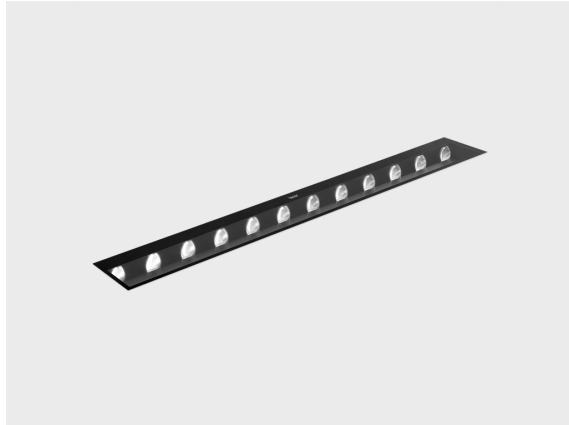

[WW]
Wall-wash

Variant

Light distribution	[WW] 45x85°
Delivered lumens flux	2649 lm
Rated input power	30 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	88 lm/W
Lamp	12 LED
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>42,000
Lifetime L80B50 (hour)	>42,000

Options

Product colours



Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	7.88 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	4/4 kV
Power factor	> 0.97
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.3 m of rubber-sheathed cable

Accessories (Included)

Mounting accessories



**Aluminium case
for ZETA 12 Dyno /
MOLTO 6 Hybrid**

007500402

Accessories (To be ordered separately)


Mounting accessories



**Case removing
vacuum**

160404012


Mounting accessories



**Connector set - 5-
pole**

141407400

Mounting accessories



Junction Box

141901135

Project name		Type		Quantity	
Date		Note			
LR9012.584-EN-WW-350-840-__-EN-C1-SS					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[WW] Wall-wash - 45x85°	[350] 30 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel 
		[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70	[DALI] DALI	
Accessories <i>(Included)</i>	Accessories <i>(To be ordered separately)</i>			
Mounting accessories	Mounting accessories			
[007500402] Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid	[160404012] Case removing vacuum [141407400] Connector set - 5-pole [141901135] Junction Box			