

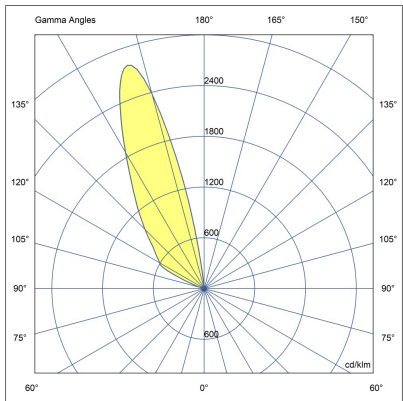


# ZETA 8 Dyno

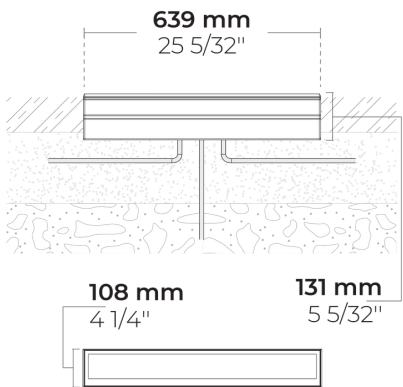

LR9012.583-US-WW-350-840-SS

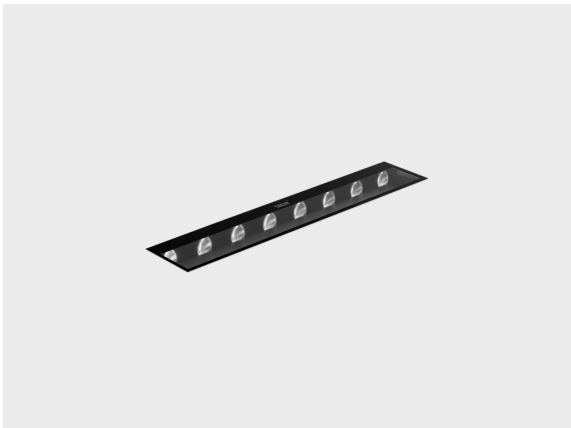

[WW]  
Wall-wash

## Configuration

Light distribution	[WW] 45x85°
Delivered lumens flux	1766 lm
Rated input power	20 W
Color temperature	4000 K CRI 80
Luminaire efficacy	88 lm/W
Lamp	8 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>42,000
Lifetime L80 (hour)	>42,000


## Options

## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	12 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-30...50°C
Power cord	12" of rubber-sheated power cord

Accessories (Included)


Mounting accessories



Aluminium case  
for ZETA 8 Dyno /  
MOLTO 4 Hybrid

007500618

Mounting accessories



Connector set - 5-  
pole

141407400

Accessories (To be ordered separately)


Mounting accessories



Case removing  
vacuum

160404012

Project name					Type		Quantity	
Date			Note					
LR9012.583-US-WW-350-840-__-SS								

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[WW]</b> Wall-wash - 45x85°	<b>[350]</b> 20 W	<b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[SS]</b> Stainless steel 
		<b>[827]</b> 2700 K CRI 80 <b>[830]</b> 3000 K CRI 80 <b>[740]</b> 4000 K CRI 70	<b>[0-10V]</b> 0-10V	
<b>Accessories</b> <i>(Included)</i>	<b>Accessories</b> <i>(To be ordered separately)</i>			
<b>Mounting accessories</b>	<b>Mounting accessories</b>			
<b>[007500618]</b> Aluminium case for ZETA 8 Dyno / MOLTO 4 Hybrid <b>[141407400]</b> Connector set - 5-pole	<b>[160404012]</b> Case removing vacuum			