


# MOLTO 4 Hybrid



CE UK CA IK08 IP67



LR9012.695-EN-N-700-840-EN-C1-SS

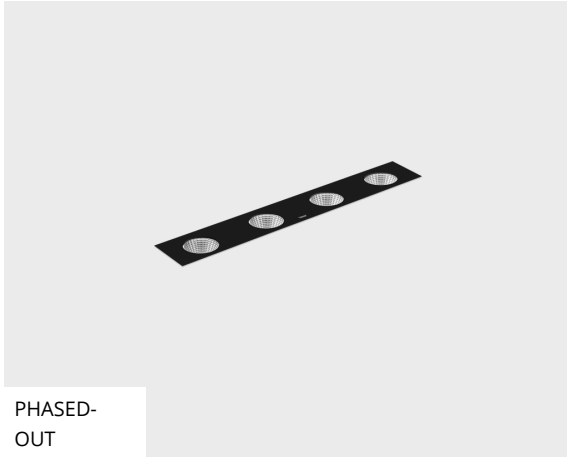

PHASED-  
OUT

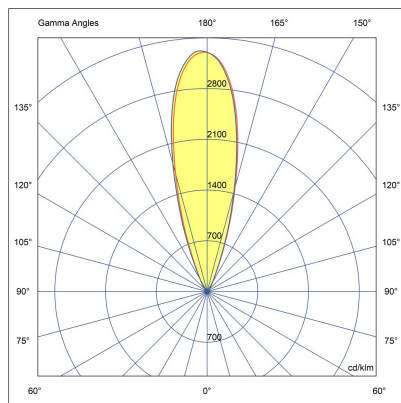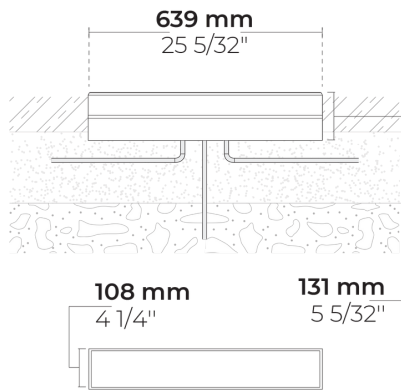

[N]  
Narrow

## Variant

Light distribution	[N] 26°
Delivered lumens flux	3810 lm
Rated input power	35 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	95 lm/W
Lamp	4 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600


## Options

## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	5.37 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	External LED driver
Driver surge protection	4/4 kV
Power factor	> 0.97
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.3 m of rubber-sheathed cable

## Accessories (Included)

### Mounting accessories



**Aluminium case  
for ZETA 8 Dyno /  
MOLTO 4 Hybrid**

007500618

## Accessories (To be ordered separately)


### Mounting accessories



**Case removing  
vacuum**

160404012


### Mounting accessories



**Connector set - 5-  
pole**

141407400


### Mounting accessories



**Junction Box**

141901135

Project name		Type		Quantity	
Date		Note			
LR9012.695-EN-N-700-840-__-EN-C1-SS-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[N]</b> Narrow - 26°	<b>[700]</b> 35 W	<b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[SS]</b> Stainless steel 
<b>[S]</b> Spot - 7°		<b>[827]</b> 2700 K CRI 80 <b>[830]</b> 3000 K CRI 80 <b>[740]</b> 4000 K CRI 70	<b>[DALI]</b> DALI	
<b>Extras</b>	<b>Accessories</b> <i>(Included)</i>	<b>Accessories (To be ordered separately)</b>		
<b>Consult the factory</b>	<b>Mounting accessories</b>	<b>Mounting accessories</b>		
<b>[UNI]</b> 120-277V 50/60Hz	<b>[007500618]</b> Aluminium case for ZETA 8 Dyno / MOLTO 4 Hybrid	<b>[160404012]</b> Case removing vacuum <b>[141407400]</b> Connector set - 5-pole <b>[141901135]</b> Junction Box		