


# MOLTO 4 Hybrid



CE UK CA IK08 IP67



LR9012.695-EN-S-700-840-EN-C1-SS

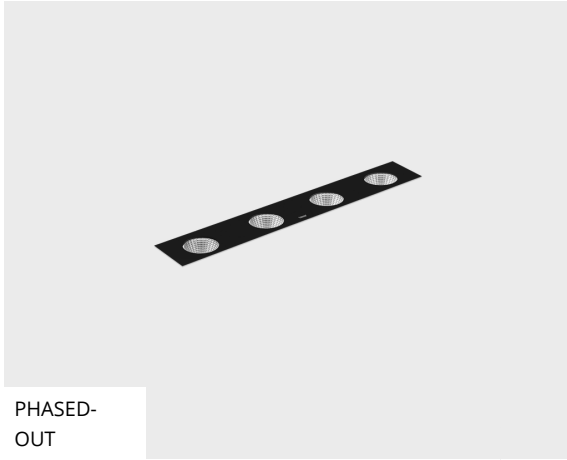

PHASED-  
OUT

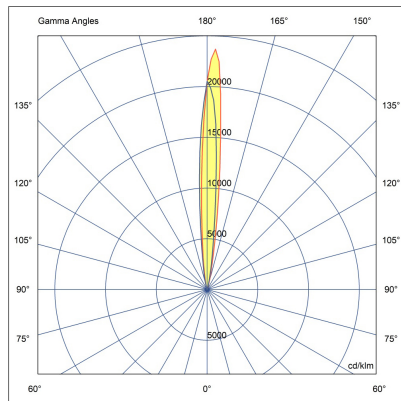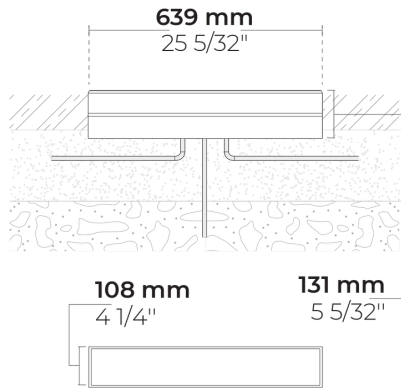

[S]  
Spot

## Variant

Light distribution	[S] 7°
Delivered lumens flux	3810 lm
Rated input power	35 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	95 lm/W
Lamp	4 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

## Options

## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	5.37 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	External LED driver
Driver surge protection	4/4 kV
Power factor	> 0.97
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.3 m of rubber-sheathed cable


HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 14.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (Included)

### Mounting accessories



**Aluminium case  
for ZETA 8 Dyno /  
MOLTO 4 Hybrid**

007500618

## Accessories (To be ordered separately)


### Mounting accessories



**Case removing  
vacuum**

160404012


### Mounting accessories



**Connector set - 5-  
pole**

141407400


### Mounting accessories



**Junction Box**

141901135

Project name		Type		Quantity	
Date		Note			
LR9012.695-EN-S-700-840-__-EN-C1-SS-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[S]</b> Spot - 7°	<b>[700]</b> 35 W	<b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[SS]</b> Stainless steel 
<b>[N]</b> Narrow - 26°		<b>[827]</b> 2700 K CRI 80 <b>[830]</b> 3000 K CRI 80 <b>[740]</b> 4000 K CRI 70	<b>[DALI]</b> DALI	
Extras	Accessories ( <i>Included</i> )	Accessories ( <i>To be ordered separately</i> )		
Consult the factory	Mounting accessories	Mounting accessories		
<b>[UNI]</b> 120-277V 50/60Hz	<b>[007500618]</b> Aluminium case for ZETA 8 Dyno / MOLTO 4 Hybrid	<b>[160404012]</b> Case removing vacuum <b>[141407400]</b> Connector set - 5-pole <b>[141901135]</b> Junction Box		