
MOLTO 6 Hybrid

LR9012.697-EN-N-700-840-ONOFF-SS





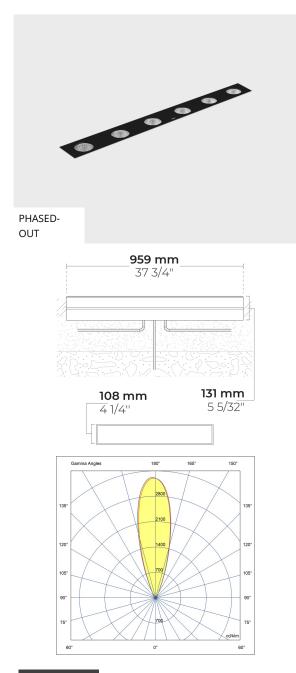

[N] Narrow - NEMA Type 2

Configuration

Light distribution	[N] 26°
Delivered lumens flux	5658 lm
Rated input power	50 W
Color temperature	4000 K CRI 80
Luminaire efficacy	113 lm/W
Lamp	6 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI
-	316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	7.75 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	External LED driver
Driver surge	4/4 kV
protection	
Power factor	> 0.97
Through wiring	Single power cord entry
Operating	-4050°C
temperature	
Power cord	12" of rubber-sheated power cord

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 20.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (Included)

Accessories (To be ordered separately)

Mounting accessories



Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid

007500402

Mounting accessories Mounting accessories Mounting accessories





Case removing Connector set - 5vacuum pole 160404012 141407400



Junction Box 141901135

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 20.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project na	me				Туре	Quantity	
Date			Note				
LR9012.	697-EN-N	-700-840	-ONOFF-	5S			

Light distribution	Rated input power	Color temperature	Control	Product colors
[N] Narrow - NEMA Type	[700] 50 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel
2 - 26° [S] Spot - NEMA Type 0 - 7°		[827] 2700 K CRI 80		
		[830] 3000 K CRI 80		
		[740] 4000 K CRI 70		
Extras	Accessories (<i>Included</i>)	Accessories (To be ordered separately)		
Consult the factory	Mounting accessories	Mounting accessories		
[UNI] 120-277V 50/60Hz	[007500402] Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid	[160404012] Case removing vacuum [141407400] Connector set - 5-pole [141901135] Junction Box		