




MOLTO 6 Hybrid



LR9012.697-US-N-700-840-SS

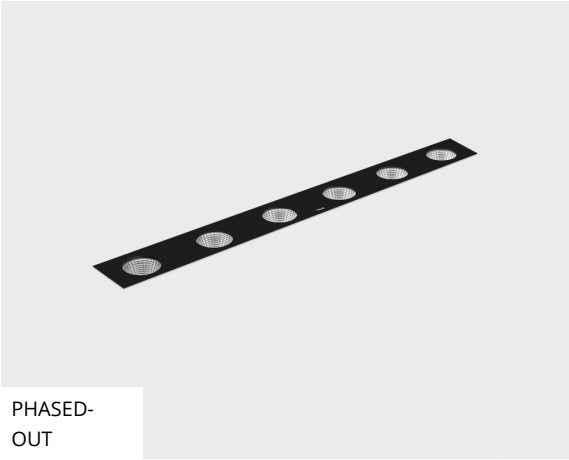

PHASED-
OUT

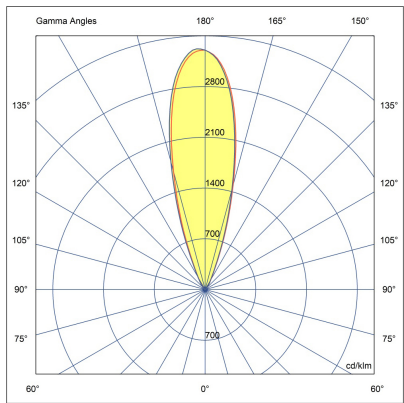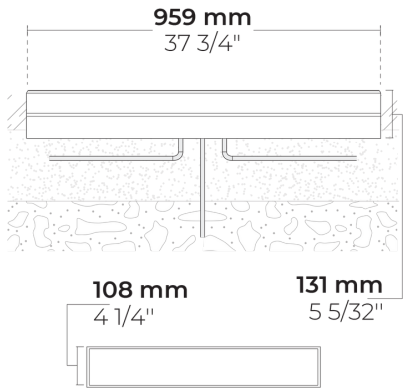

[N]
Narrow - NEMA Type
2

Configuration

Light distribution	[N] 26°
Delivered lumens flux	5658 lm
Rated input power	50 W
Color temperature	4000 K CRI 80
Luminaire efficacy	113 lm/W
Lamp	6 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	17 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	External LED driver
Driver surge protection	4/4 kV
Power factor	> 0.97
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheathed power cord


Accessories (Included)

Mounting accessories



**Aluminium case
for ZETA 12 Dyno /
MOLTO 6 Hybrid**
007500402

Mounting accessories



**Connector set - 5-
pole**
141407400

Accessories (To be ordered separately)

Mounting accessories



**Case removing
vacuum**
160404012

Project name					Type		Quantity	
Date			Note					
LR9012.697-US-N-700-840-__-SS								

Light distribution	Rated input power	Color temperature	Control	Product colors
[N] Narrow - NEMA Type 2 - 26°	[700] 50 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel
[S] Spot - NEMA Type 0 - 7°		[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70	[0-10V] 0-10V	
Accessories <i>(Included)</i>	Accessories <i>(To be ordered separately)</i>			
Mounting accessories	Mounting accessories			
[007500402] Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid [141407400] Connector set - 5-pole	[160404012] Case removing vacuum			