




MOLTO 6 Hybrid



LR9012.697-US-S-700-827-SS

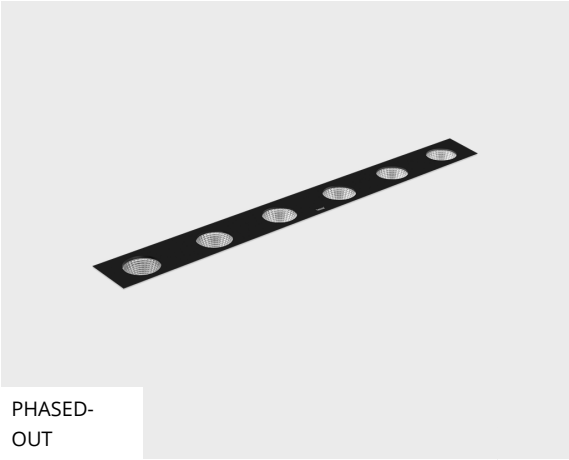

PHASED-
OUT

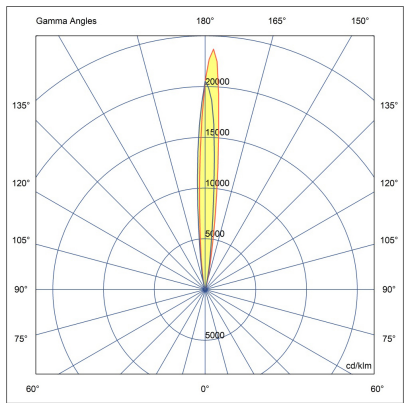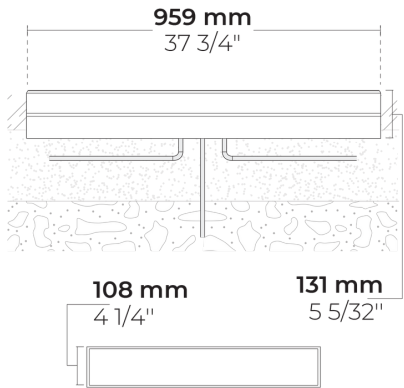

[S]

Spot - NEMA Type 0

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [S] 7° |
| Delivered lumens flux | 4980 lm |
| Rated input power | 50 W |
| Color temperature | 2700 K CRI 80 |
| Luminaire efficacy | 99 lm/W |
| Lamp | 6 LED |
| Color Deviation | 5 SDCM |
| Lifetime L90 (hour) | >72,600 |
| Lifetime L80 (hour) | >72,600 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Ground recessed mountable |
| Housing | Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade) |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | High reflectance aluminium coating |
| Glass / Diffuser | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP67 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 17 lbs |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | External LED driver |
| Driver surge protection | 4/4 kV |
| Power factor | > 0.97 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 12" of rubber-sheathed power cord |


Accessories (Included)

Mounting accessories



Aluminium case
for ZETA 12 Dyno /
MOLTO 6 Hybrid
007500402

Mounting accessories



Connector set - 5-
pole
141407400


Accessories (To be ordered separately)

Mounting accessories



Case removing
vacuum
160404012

| | | | | | | | | |
|-------------------------------|--|------|--|--|------|--|----------|--|
| Project name | | | | | Type | | Quantity | |
| Date | | Note | | | | | | |
| LR9012.697-US-S-700-827-__-SS | | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|--|---|--|--------------------------|--|
| [S] Spot - NEMA Type 0 - 7° | [700] 50 W | [827] 2700 K CRI 80 | [ONOFF] On/Off | [SS] Stainless steel  |
| [N] Narrow - NEMA Type 2 - 26° | | [830] 3000 K CRI 80 [840] 4000 K CRI 80 | [0-10V] 0-10V | |
| Accessories (Included) | Accessories (To be ordered separately) | | | |
| Mounting accessories | Mounting accessories | | | |
| [007500402] Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid [141407400] Connector set - 5-pole | [160404012] Case removing vacuum | | | |