


LB6011.513-EN-SYM-4L-700-830-ONOFF-EN-C1

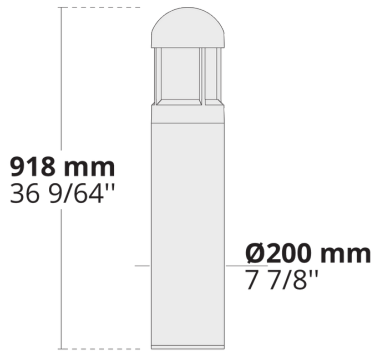

[SYM-4L]

Symmetric, Special
effect: 4 lines

Variant

Light distribution	[SYM-4L] 360°
Delivered lumens flux	1473 lm
Rated input power	20 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	74 lm/W
Lamp	8 LED
MacAdam Ellipse	3 SDCM
BUG rating	B1-U0-G1
Lifetime L90B50 (hour)	>145,000
Lifetime L80B50 (hour)	>145,000


Options

Technical information

Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	EPDM gasket (Shore A 50)
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	10 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

Accessories (To be ordered separately)








Anchorage



623J014

623J014

Project name		Type		Quantity	
Date		Note			
LB6011.513-EN-SYM-4L-700-830-ONOFF-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[SYM-4L] Symmetric, Special effect: 4 lines - 360°	[700] 20 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black	
		[740] 4000 K CRI 70		[HM2] Dark grey	
				[HM3] Anthracite grey	
				[HM4] Light grey	
				[HM5] White	
				[HM6] Bronze	
				[CC] Custom colour (Please specify RAL code)	
Extras	Accessories (<i>To be ordered separately</i>)				
Consult the factory	Anchorage				
[UNI] 120-277V 50/60Hz	[623J014] 623J014				
Luminaire body options					
[DPC] Double powder coating					