



AQSA 0.75 m

CE UK CA IK08 IP65

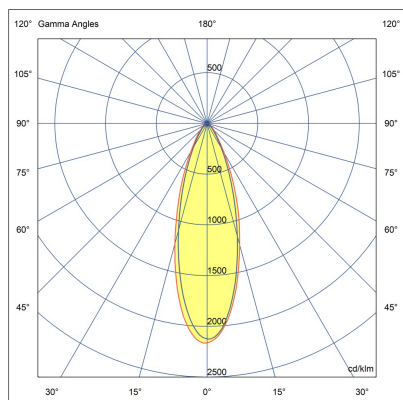

LW7034.516-EN-MN-700-840-EN-C1



[MN]

Medium narrow

Variant

Light distribution	[MN] 35°
Delivered lumens flux	2993 lm
Rated input power	33 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	90 lm/W
Lamp	15 LED
MacAdam Ellipse	4 SDCM
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Technical information

Mounting	Surface mountable via a bracket
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	3.57 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 18.05.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name		Type		Quantity	
Date		Note			
LW7034.516-EN-MN-700-840-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[MN] Medium narrow - 35°	[700] 33 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[HM1] Black	
[EL] Elliptical - 147x106°	[350] 16 W	[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark grey	
[EL] Elliptical - 41x13°		[830] 3000 K CRI 80		[HM3] Anthracite grey	
[N] Narrow - 20°		[740] 4000 K CRI 70		[HM4] Light grey	
[M] Medium - 65°				[HM5] White	
				[HM6] Bronze	
				[CC] Custom colour (Please specify RAL code)	
Extras					
Mounting options					
[ASB] Angle setting bracket					
[LB] Long bracket					
Consult the factory					
[UNI] 120-277V 50/60Hz					