



AQSA 2.5'

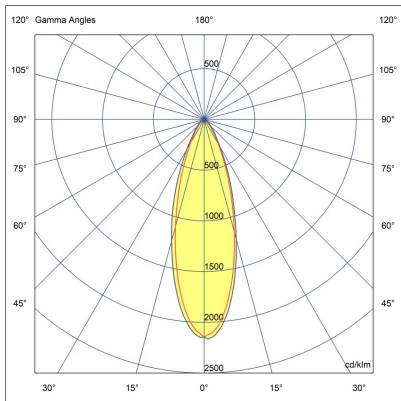

LW7034.516-US-MN-700-740



[MN]

Medium narrow -
NEMA Type 3

Configuration

Light distribution	[MN] 35°
Delivered lumens flux	3550 lm
Rated input power	33 W
Color temperature	4000 K CRI 70
Luminaire efficacy	107 lm/W
Lamp	15 LED
Color Deviation	4 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

Options

Technical information

Mounting	Yoke mount
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	7.8 lbs
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Project name				Type		Quantity	
Date		Note					
LW7034.516-US-MN-700-740-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[MN] Medium narrow - NEMA Type 3 - 35°	[700] 33 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1]  Black
[EL] Elliptical - 147x106°	[350] 16 W	[827] 2700 K CRI 80	[0-10V] 0-10V	[HM2]  Dark gray
[EL] Elliptical - 41x13°		[830] 3000 K CRI 80		[HM3]  Anthracite gray
[N] Narrow - NEMA Type 2 - 20°		[840] 4000 K CRI 80		[HM4]  Light gray
[M] Medium - NEMA Type 4 - 65°				[HM5]  White
				[HM6]  Bronze
				[CC]  Custom color (Please specify RAL code)
Extras				
Mounting options				
[ASB] Angle setting bracket				
[LB] Long bracket				