



AQSA 2.5'

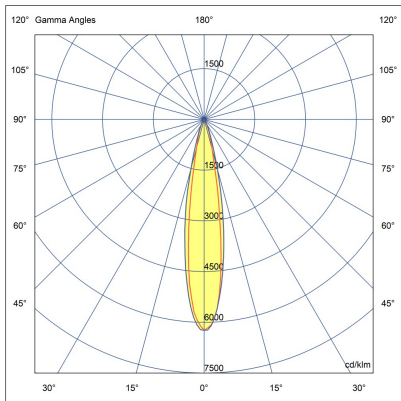

LW7034.516-US-N-350-830



[N]

Narrow - NEMA Type 2

Configuration

Light distribution	[N] 20°
Delivered lumens flux	1745 lm
Rated input power	16 W
Color temperature	3000 K CRI 80
Luminaire efficacy	109 lm/W
Lamp	15 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

Options

Technical information

Mounting	Yoke mount
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	7.8 lbs
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Project name					Type		Quantity	
Date			Note					
LW7034.516-US-N-350-830-__-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
[N] Narrow - NEMA Type 2 - 20° [EL] Elliptical - 147x106° [EL] Elliptical - 41x13° [MN] Medium narrow - NEMA Type 3 - 35° [M] Medium - NEMA Type 4 - 65°	[350] 16 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black 
	[700] 33 W	[827] 2700 K CRI 80	[0-10V] 0-10V	[HM2] Dark gray 
		[740] 4000 K CRI 70		[HM3] Anthracite gray 
		[840] 4000 K CRI 80		[HM4] Light gray 
				[HM5] White 
				[HM6] Bronze 
				[CC] Custom color (Please specify RAL code) 
Extras				
Mounting options				
[ASB] Angle setting bracket [LB] Long bracket				