



AQSA 2.5'

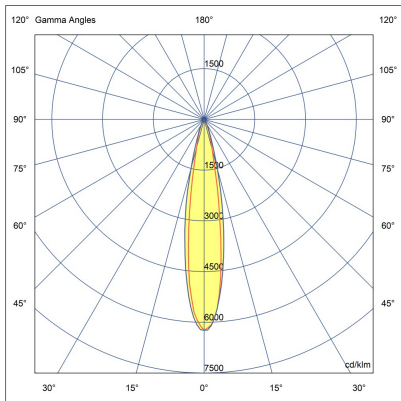

LW7034.516-US-N-350-840

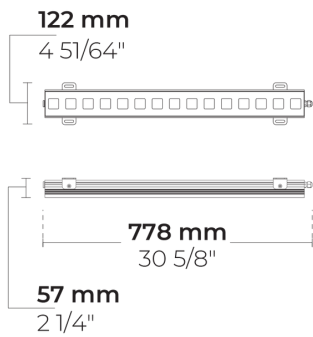

[N]

Narrow - NEMA Type 2

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [N] 20° |
| Delivered lumens flux | 1745 lm |
| Rated input power | 16 W |
| Color temperature | 4000 K CRI 80 |
| Luminaire efficacy | 109 lm/W |
| Lamp | 15 LED |
| Color Deviation | 4 SDCM |
| Lifetime L90 (hour) | >102,000 |
| Lifetime L80 (hour) | >102,000 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Yoke mount |
| Housing | Corrosion resistant, extruded, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | PMMA lens with high optical efficiency |
| Glass / Diffuser | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP65 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 7.8 lbs |
| LED module | High power LEDs on metal-core PCB |
| Driver | External LED driver |
| Driver surge protection | 10/6 kV |
| Power factor | > 0.95 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 20" of outdoor use rated flexible power cord |

| | | | | | | | |
|----------------------------------|--|------|--|------|--|----------|--|
| Project name | | | | Type | | Quantity | |
| Date | | Note | | | | | |
| LW7034.516-US-N-350-840-__-__-__ | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|--|----------------------|-------------------------------|--------------------------|---|
| [N] Narrow - NEMA Type 2 - 20° | [350] 16 W | [840] 4000 K CRI 80 | [ONOFF] On/Off | [HM1] Black |
| [EL] Elliptical - 147x106° | [700] 33 W | [827] 2700 K CRI 80 | [0-10V] 0-10V | [HM2] Dark gray |
| [EL] Elliptical - 41x13° | | [830] 3000 K CRI 80 | | [HM3] Anthracite gray |
| [MN] Medium narrow - NEMA Type 3 - 35° | | [740] 4000 K CRI 70 | | [HM4] Light gray |
| [M] Medium - NEMA Type 4 - 65° | | | | [HM5] White |
| | | | | [HM6] Bronze |
| | | | | [CC] Custom color (Please specify RAL code) |
| Extras | | | | |
| Mounting options | | | | |
| [ASB] Angle setting bracket | | | | |
| [LB] Long bracket | | | | |