



# AQSA 2.5'

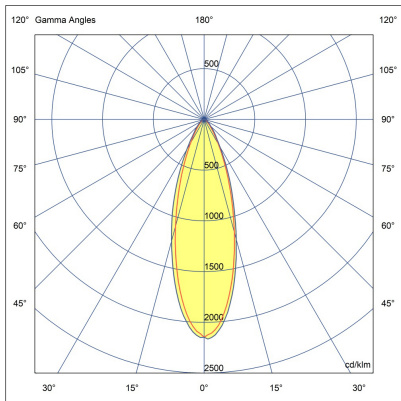

LW7034.516-US-MN-350-827

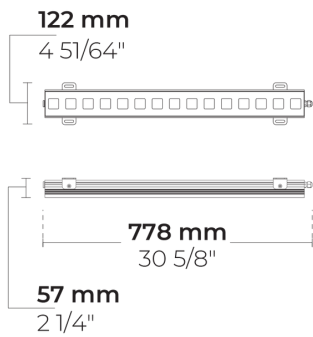

[MN]

Medium narrow -  
NEMA Type 3

## Configuration








Light distribution	[MN] 35°
Delivered lumens flux	1620 lm
Rated input power	16 W
Color temperature	2700 K CRI 80
Luminaire efficacy	101 lm/W
Lamp	15 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

## Options

## Technical information

Mounting	Yoke mount
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	7.8 lbs
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Project name				Type		Quantity	
Date		Note					
LW7034.516-US-MN-350-827-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[MN]</b> Medium narrow - NEMA Type 3 - 35°	<b>[350]</b> 16 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
<b>[EL]</b> Elliptical - 147x106°	<b>[700]</b> 33 W	<b>[830]</b> 3000 K CRI 80	<b>[0-10V]</b> 0-10V	<b>[HM2]</b>  Dark gray
<b>[EL]</b> Elliptical - 41x13°		<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b>  Anthracite gray
<b>[N]</b> Narrow - NEMA Type 2 - 20°		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b>  Light gray
<b>[M]</b> Medium - NEMA Type 4 - 65°				<b>[HM5]</b>  White
				<b>[HM6]</b>  Bronze
				<b>[CC]</b>  Custom color (Please specify RAL code)
Extras				
Mounting options				
<b>[ASB]</b> Angle setting bracket				
<b>[LB]</b> Long bracket				