


# DRAGO Side Duo



LB6068.571-US-SLSB-700-840

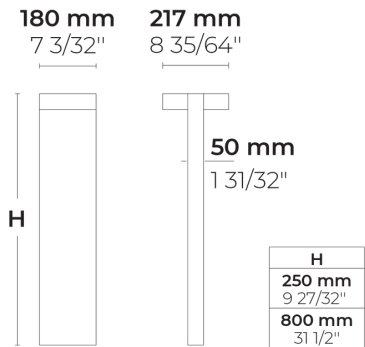

[SLSB]

Special linear, Side  
throw

## Configuration

Light distribution	[SLSB] 145x45°
Delivered lumens flux	1988 lm
Rated input power	20 W
Color temperature	4000 K CRI 80
Luminaire efficacy	99 lm/W
Lamp	4 LED
Color Deviation	3 SDCM
BUG rating	B0-U0-G0
Lifetime L90 (hour)	>42,000
Lifetime L80 (hour)	>42,000


## Options

## Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	110-120V 50/60Hz
Insulation class	Class I
Weight	15.4 lbs (2.6'), 13.2 lbs (0.8')
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord
Notes	3000K CCT or warmer must be selected to be DarkSky International certified.

# Accessories (To be ordered separately)

## Anchor bolts



628I000

628I000

Project name				Type		Quantity	
Date		Note					

**LB6068.571-US-SLSB-700-840-**

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SLSB]</b> Special linear, Side throw - 145x45°	<b>[700]</b> 20 W	<b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black
	<b>[350]</b> 10 W	<b>[822]</b> 2200 K CRI 80	<b>[0-10V]</b> 0-10V	<b>[HM2]</b> Dark gray
		<b>[827]</b> 2700 K CRI 80		<b>[HM3]</b> Anthracite gray
		<b>[830]</b> 3000 K CRI 80		<b>[HM4]</b> Light gray
		<b>[740]</b> 4000 K CRI 70		<b>[HM5]</b> White
				<b>[HM6]</b> Bronze
				<b>[CC]</b> Custom color (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
<b>[H0.25]</b> 0.8'	<b>Consult the factory</b>	<b>Anchor bolts</b>		
<b>[H0.80]</b> 2.6'	<b>[EK]</b> Emergency kit	<b>[628I000]</b> 628I000		
<b>[HC]</b>	<b>[MS]</b> Motion sensor			
	<b>Luminaire body options</b>			
	<b>[DPC]</b> Double powder coating			