

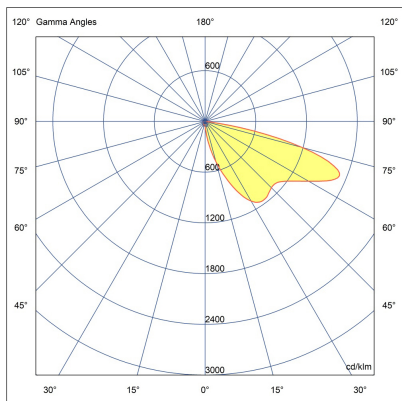
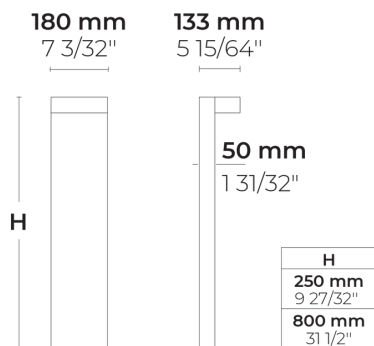
# DRAGO Forward



IK08 IP65



LB6048.575-EN-SLFB-350-840-EN-C1

**[SLFB]**Special linear,  
Forward throw

## Variant

<b>Light distribution</b>	[SLFB] 65x70°
<b>Delivered lumens flux</b>	994 lm
<b>Rated input power</b>	10 W
<b>Colour temperature</b>	4000 K CRI 80
<b>Luminaire efficacy</b>	99 lm/W
<b>Lamp</b>	4 LED
<b>MacAdam Ellipse</b>	3 SDCM
<b>BUG rating</b>	B1-U0-G1
<b>Lifetime L90B50 (hour)</b>	>42,000
<b>Lifetime L80B50 (hour)</b>	>42,000

## Options

## Technical information

<b>Mounting</b>	Surface mountable
<b>Housing</b>	Corrosion resistant, extruded, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Liquid silicone
<b>Lens / Reflector</b>	High reflectance aluminium coating, multifaceted micro reflector
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	3.53 kg (0.25 m), 4.5 kg (0.8 m)
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	1/1 kV
<b>Power factor</b>	> 0.90
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C
<b>Cable</b>	0.5 m of flexible cable
<b>Packing box dimensions</b>	15*20*30 cm (0.25 m), 15*20*85 cm (0.8 m)

**HPR Pazarlama A.Ş.**  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com


**HEPER Europe GmbH**  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---

### Anchorage



**628I000**

628I000

Project name		Type		Quantity	
Date		Note			
LB6048.575-EN-SLFB-350-840-__-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLFB] Special linear, Forward throw - 65x70°	[350] 10 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[HM1] Black
	[700] 20 W	[822] 2200 K CRI 80  [827] 2700 K CRI 80  [830] 3000 K CRI 80  [740] 4000 K CRI 70	[DALI] DALI	[HM2] Dark grey  [HM3] Anthracite grey  [HM4] Light grey  [HM5] White  [HM6] Bronze  [CC] Custom colour (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
[H0.25] 25cm  [H0.80] 80cm  [HC]	Consult the factory	Anchorage		
	[EK] Emergency kit	[628I000] 628I000		
	[MS] Motion sensor			
	[UNI] 120-277V 50/60Hz			
	Luminaire body options			
	[DPC] Double powder coating			