




DRAGO Forward

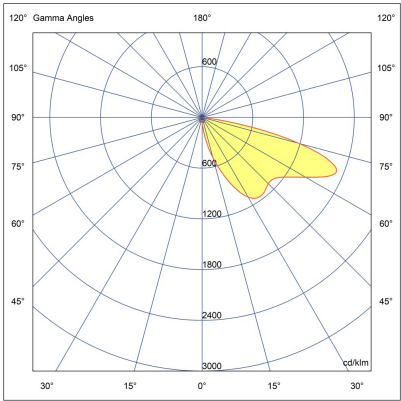

LB6048.575-US-SLFB-700-840

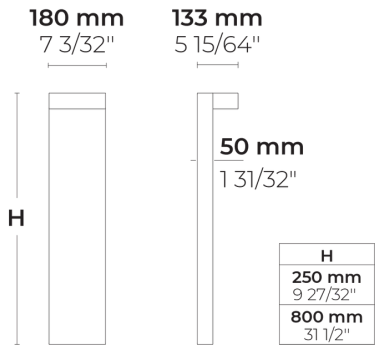

[SLFB]

Special linear,
Forward throw

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [SLFB] 65x70° |
| Delivered lumens flux | 1988 lm |
| Rated input power | 20 W |
| Color temperature | 4000 K CRI 80 |
| Luminaire efficacy | 99 lm/W |
| Lamp | 4 LED |
| Color Deviation | 3 SDCM |
| BUG rating | B1-U0-G1 |
| Lifetime L90 (hour) | >42,000 |
| Lifetime L80 (hour) | >42,000 |


Options

Technical information

| | |
|-------------------------|---|
| Mounting | Surface mountable |
| Housing | Corrosion resistant, extruded, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | High reflectance aluminium coating, multifaceted micro reflector |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP65 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 7.76 lbs (0.8'), 9.9 lbs (2.6') |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 3/3 kV |
| Power factor | > 0.90 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 20" of outdoor use rated flexible power cord |
| Notes | 3000K CCT or warmer must be selected to be DarkSky International certified. |

Accessories (To be ordered separately)








Anchor bolts



628I000

628I000

| | | | | | | | |
|--|--|------|--|------|--|----------|--|
| Project name | | | | Type | | Quantity | |
| Date | | Note | | | | | |
| LB6048.575-US-SLFB-700-840-__-__-__-__ | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|--|-----------------------------------|---|-------------------|---|
| [SLFB] Special linear, Forward throw - 65x70° | [700] 20 W | [840] 4000 K CRI 80 | [ONOFF] On/Off | [HM1] Black  |
| | [350] 10 W | [822] 2200 K CRI 80 | [0-10V] 0-10V | [HM2] Dark gray  |
| | | [827] 2700 K CRI 80 | | [HM3] Anthracite gray  |
| | | [830] 3000 K CRI 80 | | [HM4] Light gray  |
| | | [740] 4000 K CRI 70 | | [HM5] White  |
| | | | | [HM6] Bronze  |
| | | | | [CC]  Custom color (Please specify RAL code) |
| Height | Extras | Accessories (<i>To be ordered separately</i>) | | |
| [H0.25] 0.8' [H0.80] 2.6' [HC] | Consult the factory | Anchor bolts | | |
| | [EK] Emergency kit | [628I000] 628I000 | | |
| | [MS] Motion sensor | | | |
| | Luminaire body options | | | |
| | [DPC] Double powder coating | | | |