



DRAGO Ex Side

CE UK CA IK08 IP65

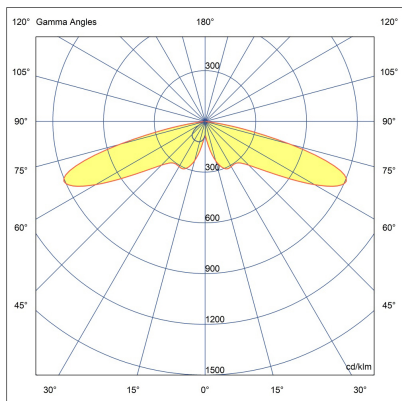

LB7035.585-EN-SLSB-350-827-EN-C1

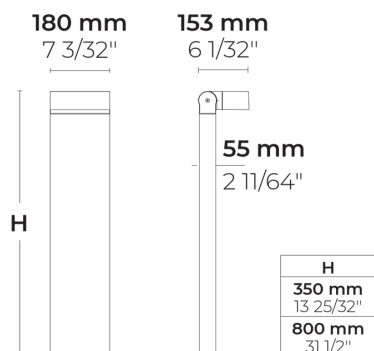

[SLSB]

Special linear, Side throw

Variant

| | |
|------------------------|----------------|
| Light distribution | [SLSB] 145x45° |
| Delivered lumens flux | 448 lm |
| Rated input power | 5 W |
| Colour temperature | 2700 K CRI 80 |
| Luminaire efficacy | 89 lm/W |
| Lamp | 2 LED |
| MacAdam Ellipse | 3 SDCM |
| BUG rating | B0-U0-G0 |
| Lifetime L90B50 (hour) | >42,000 |
| Lifetime L80B50 (hour) | >42,000 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Surface mountable |
| Tilt angle | +135°/0° |
| Housing | Corrosion resistant, extruded, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | High reflectance aluminium coating, multifaceted micro reflector |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP65 |
| Input voltage | 220-240V 50/60Hz |
| Insulation class | Class I |
| Weight | 4.50 kg (0.35 m), 6.0 kg (0.8 m) |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 1/1 kV |
| Power factor | > 0.90 |
| Through wiring | Single cable entry |
| Operating temperature | -40...50°C |
| Cable | 0.5 m of flexible cable |
| Notes | QUICK SHIP: Some variants will be delivered faster. Please consult the factory. |


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 09.05.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Anchorage



628I000

628I000

| | | | | | |
|---|--|------|--|----------|--|
| Project name | | Type | | Quantity | |
| Date | | Note | | | |
| LB7035.585-EN-SLSB-350-827-__-EN-C1-__-__-__-__ | | | | | |

| Light distribution | Rated input power | Colour temperature | Control | Product colours |
|---|-----------------------------------|--|---|--|
| [SLSB] Special linear, Side throw - 145x45° | [350] 5 W | [827] 2700 K CRI 80 | [ONOFF] On/Off [DALI] DALI | [HM1] Black |
| | [700] 10 W | [822] 2200 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80 | | [HM2] Dark grey [HM3] Anthracite grey [HM4] Light grey [HM5] White [HM6] Bronze [CC] Custom colour (Please specify RAL code) |
| Height | Extras | Accessories (<i>To be ordered separately</i>) | | |
| [H0.80] 80cm [HC] | Consult the factory | Anchorage | | |
| | [EK] Emergency kit | [628I000] 628I000 | | |
| | [MS] Motion sensor | | | |
| | [UNI] 120-277V 50/60Hz | | | |
| | Luminaire body options | | | |
| | [DPC] Double powder coating | | | |