



## DRAGO Ex Side

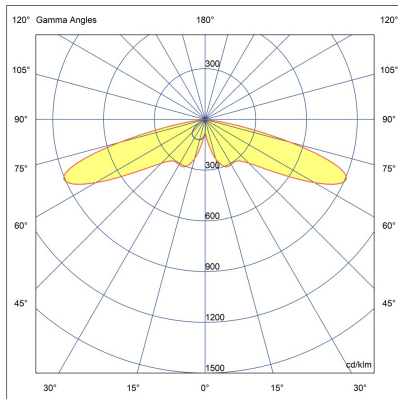

LB7035.585-EN-SLSB-350-827

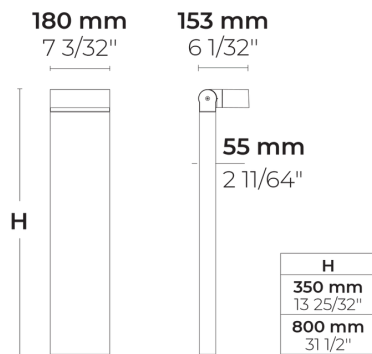

**[SLSB]**

Special linear, Side throw

## Configuration

<b>Light distribution</b>	[SLSB] 145x45°
<b>Delivered lumens flux</b>	448 lm
<b>Rated input power</b>	5 W
<b>Color temperature</b>	2700 K CRI 80
<b>Luminaire efficacy</b>	89 lm/W
<b>Lamp</b>	2 LED
<b>Color Deviation</b>	3 SDCM
<b>BUG rating</b>	B0-U0-G0
<b>Lifetime L90 (hour)</b>	>42,000
<b>Lifetime L80 (hour)</b>	>42,000


## Options

## Technical information

<b>Mounting</b>	Surface mountable
<b>Tilt angle</b>	+135°/0°
<b>Housing</b>	Corrosion resistant, extruded, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Liquid silicone
<b>Lens / Reflector</b>	High reflectance aluminium coating, multifaceted micro reflector
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	4.50 kg (0.35 m), 6.0 kg (0.8 m)
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	1/1 kV
<b>Power factor</b>	> 0.90
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	20" of outdoor use rated flexible power cord
<b>Notes</b>	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.

Accessories (To be ordered separately)

Anchor bolts



628I000  
628I000

Project name				Type		Quantity	
Date		Note					

**LB7035.585-EN-SLSB-350-827-**

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SLSB]</b> Special linear, Side throw - 145x45°	<b>[350]</b> 5 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black
	<b>[700]</b> 10 W	<b>[822]</b> 2200 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80	<b>[DALI]</b> DALI	<b>[HM2]</b> Dark gray  <b>[HM3]</b> Anthracite gray  <b>[HM4]</b> Light gray  <b>[HM5]</b> White  <b>[HM6]</b> Bronze  <b>[CC]</b> Custom color (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
<b>[H0.80]</b> 2.6'  <b>[HC]</b>	<b>Consult the factory</b>	<b>Anchor bolts</b>		
	<b>[EK]</b> Emergency kit	<b>[628I000]</b> 628I000		
	<b>[MS]</b> Motion sensor			
	<b>[UNI]</b> 120-277V 50/60Hz			
	<b>Luminaire body options</b>			
	<b>[DPC]</b> Double powder coating			