



# DRAGO Side



IK08 IP65



LB6048.585-EN-SLSB-700-840-EN-C1

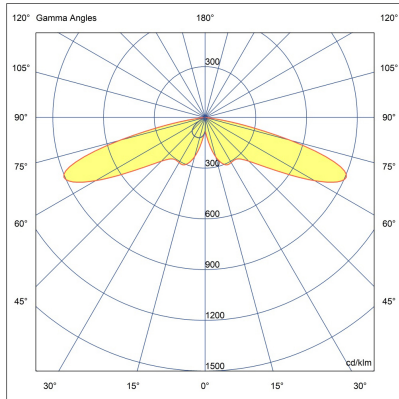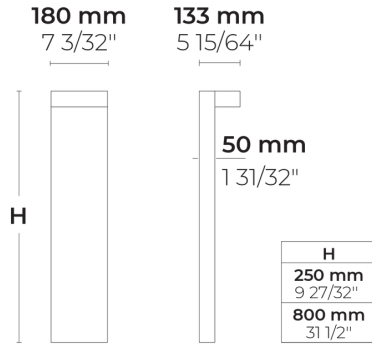

[SLSB]

Special linear, Side throw

## Variant

|                        |                |
|------------------------|----------------|
| Light distribution     | [SLSB] 145x45° |
| Delivered lumens flux  | 994 lm         |
| Rated input power      | 10 W           |
| Colour temperature     | 4000 K CRI 80  |
| Luminaire efficacy     | 99 lm/W        |
| Lamp                   | 2 LED          |
| MacAdam Ellipse        | 3 SDCM         |
| BUG rating             | B1-U0-G1       |
| Lifetime L90B50 (hour) | >42,000        |
| Lifetime L80B50 (hour) | >42,000        |

## Options


## Technical information

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Mounting                | Surface mountable                                                         |
| Housing                 | Corrosion resistant, extruded, marine grade aluminum housing              |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Liquid silicone                                                           |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector          |
| Glass / Diffusor        | Tempered safety glass                                                     |
| Impact protection       | IK08                                                                      |
| Ingress protection      | IP65                                                                      |
| Input voltage           | 220-240V 50/60Hz                                                          |
| Insulation class        | Class I                                                                   |
| Weight                  | 3.53 kg (0.25 m), 4.5 kg (0.8 m)                                          |
| LED module              | High power LEDs on metal-core PCB                                         |
| Driver                  | Internal LED driver                                                       |
| Driver surge protection | 1/1 kV                                                                    |
| Power factor            | > 0.90                                                                    |
| Through wiring          | Single cable entry                                                        |
| Operating temperature   | -40...50°C                                                                |
| Cable                   | 0.5 m of flexible cable                                                   |
| Packing box dimensions  | 15*20*30 cm (0.25 m), 15*20*85 cm (0.8 m)                                 |

## Accessories (To be ordered separately)

---

### Anchorage



**628I000**

628I000

|                                                 |  |      |  |          |  |
|-------------------------------------------------|--|------|--|----------|--|
| Project name                                    |  | Type |  | Quantity |  |
| Date                                            |  | Note |  |          |  |
| LB6048.585-EN-SLSB-700-840-__-EN-C1-__-__-__-__ |  |      |  |          |  |

| Light distribution                                 | Rated input power              | Colour temperature                                                                                               | Control           | Product colours                                                                                                                                                                   |
|----------------------------------------------------|--------------------------------|------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [SLSB]<br>Special linear, Side throw - 145x45°     | [700]<br>10 W                  | [840]<br>4000 K CRI 80                                                                                           | [ONOFF]<br>On/Off | [HM1]<br>Black                                                                                                                                                                    |
|                                                    | [350]<br>5 W                   | [822]<br>2200 K CRI 80<br><br>[827]<br>2700 K CRI 80<br><br>[830]<br>3000 K CRI 80<br><br>[740]<br>4000 K CRI 70 | [DALI]<br>DALI    | [HM2]<br>Dark grey<br><br>[HM3]<br>Anthracite grey<br><br>[HM4]<br>Light grey<br><br>[HM5]<br>White<br><br>[HM6]<br>Bronze<br><br>[CC]<br>Custom colour (Please specify RAL code) |
| Height                                             | Extras                         | Accessories ( <i>To be ordered separately</i> )                                                                  |                   |                                                                                                                                                                                   |
| [H0.25]<br>25cm<br><br>[H0.80]<br>80cm<br><br>[HC] | Consult the factory            | Anchorage                                                                                                        |                   |                                                                                                                                                                                   |
|                                                    | [EK]<br>Emergency kit          | [628I000]<br>628I000                                                                                             |                   |                                                                                                                                                                                   |
|                                                    | [MS]<br>Motion sensor          |                                                                                                                  |                   |                                                                                                                                                                                   |
|                                                    | [UNI]<br>120-277V 50/60Hz      |                                                                                                                  |                   |                                                                                                                                                                                   |
|                                                    | Luminaire body options         |                                                                                                                  |                   |                                                                                                                                                                                   |
|                                                    | [DPC]<br>Double powder coating |                                                                                                                  |                   |                                                                                                                                                                                   |