



# DOGO Ex Forward

CE UK CA IK08 IP65

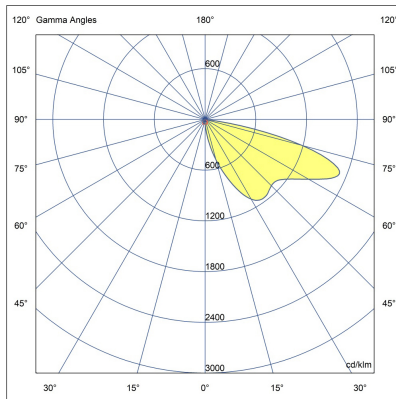

LW7035.575-EN-SLFW-700-827-EN-C1

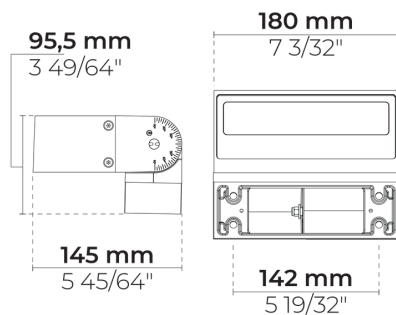

[SLFW]

Special linear,  
Forward throw

## Variant

Light distribution	[SLFW] 111x53°
Delivered lumens flux	1925 lm
Rated input power	20 W
Colour temperature	2700 K CRI 80
Luminaire efficacy	96 lm/W
Lamp	4 LED
BUG rating	B1-U0-G1
Lifetime L90B50 (hour)	>42,000
Lifetime L80B50 (hour)	>42,000

## Options

## Technical information

Mounting	Surface or wall mountable with angle setting mechanism
Tilt angle	+135°/0°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	5.1 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable
Notes	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---

### Mounting accessories



**DALI driver within  
an IP67 box for  
DOGO**

007502840

Project name		Type		Quantity	
Date		Note			
LW7035.575-EN-SLFW-700-827-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[SLFW]</b> Special linear, Forward throw - 111x53°	<b>[700]</b> 20 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black
	<b>[350]</b> 10 W	<b>[822]</b> 2200 K CRI 80	<b>[DALI]</b> DALI	<b>[HM2]</b> Dark grey
		<b>[830]</b> 3000 K CRI 80		<b>[HM3]</b> Anthracite grey
		<b>[740]</b> 4000 K CRI 70		<b>[HM4]</b> Light grey
		<b>[840]</b> 4000 K CRI 80		<b>[HM5]</b> White
				<b>[HM6]</b> Bronze
				<b>[CC]</b> Custom colour (Please specify RAL code)
Extras	Accessories ( <i>To be ordered separately</i> )			
Consult the factory	Mounting accessories			
<b>[EK]</b> Emergency kit	<b>[007502840]</b> DALI driver within an IP67 box for DOGO			
<b>[MS]</b> Motion sensor				
Luminaire body options				
<b>[DPC]</b> Double powder coating				