
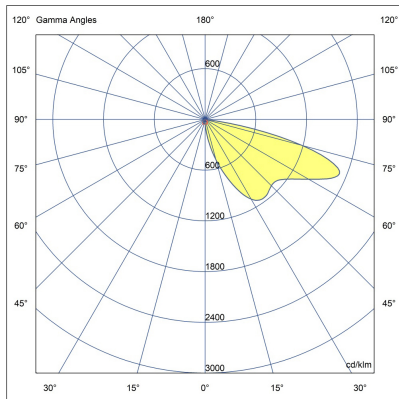


LW6048.575-EN-SLFW-350-840-ONOFF-EN-C1

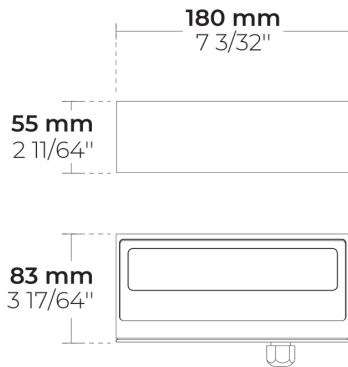

[SLFW]  
Special linear,  
Forward throw

## Variant

|                        |                |
|------------------------|----------------|
| Light distribution     | [SLFW] 111x53° |
| Delivered lumens flux  | 1068 lm        |
| Rated input power      | 10 W           |
| Colour temperature     | 4000 K CRI 80  |
| Luminaire efficacy     | 106 lm/W       |
| Lamp                   | 4 LED          |
| BUG rating             | B0-U0-G1       |
| Lifetime L90B50 (hour) | >42,000        |
| Lifetime L80B50 (hour) | >42,000        |

## Options

## Technical information

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Mounting                | Surface or wall mountable                                                 |
| Housing                 | Corrosion resistant, marine grade aluminum housing                        |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone                                                                  |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector          |
| Glass / Diffusor        | Tempered safety glass                                                     |
| Impact protection       | IK08                                                                      |
| Ingress protection      | IP65                                                                      |
| Input voltage           | 220-240V 50/60Hz                                                          |
| Insulation class        | Class I                                                                   |
| Weight                  | 1.1 kg                                                                    |
| LED module              | High power LEDs on metal-core PCB                                         |
| Driver                  | Internal LED driver                                                       |
| Driver surge protection | 1/1 kV                                                                    |
| Power factor            | > 0.90                                                                    |
| Through wiring          | Single cable entry                                                        |
| Operating temperature   | -40...50°C                                                                |
| Cable                   | 0.2 m of flexible cable                                                   |
| Packing box dimensions  | 11*20*7 cm                                                                |

## Accessories (To be ordered separately)

---

### Mounting accessories



**DALI driver within  
an IP67 box for  
DOGO**

007502840

|                                                 |  |      |  |          |  |
|-------------------------------------------------|--|------|--|----------|--|
| Project name                                    |  | Type |  | Quantity |  |
| Date                                            |  | Note |  |          |  |
| LW6048.575-EN-SLFW-350-840-ONOFF-EN-C1-__-__-__ |  |      |  |          |  |

| Light distribution                                                    | Rated input power                                                | Colour temperature            | Control                  | Product colours                                           |                                                                                     |
|-----------------------------------------------------------------------|------------------------------------------------------------------|-------------------------------|--------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>[SLFW]</b><br>Special linear,<br>Forward throw -<br>111x53°        | <b>[350]</b><br>10 W                                             | <b>[840]</b><br>4000 K CRI 80 | <b>[ONOFF]</b><br>On/Off | <b>[HM1]</b><br>Black                                     |  |
|                                                                       | <b>[700]</b><br>20 W                                             | <b>[822]</b><br>2200 K CRI 80 |                          | <b>[HM2]</b><br>Dark grey                                 |  |
|                                                                       |                                                                  | <b>[827]</b><br>2700 K CRI 80 |                          | <b>[HM3]</b><br>Anthracite grey                           |  |
|                                                                       |                                                                  | <b>[830]</b><br>3000 K CRI 80 |                          | <b>[HM4]</b><br>Light grey                                |  |
|                                                                       |                                                                  | <b>[740]</b><br>4000 K CRI 70 |                          | <b>[HM5]</b><br>White                                     |  |
|                                                                       |                                                                  |                               |                          | <b>[HM6]</b><br>Bronze                                    |  |
|                                                                       |                                                                  |                               |                          | <b>[CC]</b><br>Custom colour (Please<br>specify RAL code) |  |
| <b>Extras</b>                                                         | <b>Accessories (<i>To be ordered separately</i>)</b>             |                               |                          |                                                           |                                                                                     |
| <b>Mounting options</b>                                               | <b>Mounting accessories</b>                                      |                               |                          |                                                           |                                                                                     |
| <b>[ESMA]</b><br>Extra surface<br>mounting adaptor for<br>a flat wall | <b>[007502840]</b><br>DALI driver within an<br>IP67 box for DOGO |                               |                          |                                                           |                                                                                     |
| <b>Consult the factory</b>                                            |                                                                  |                               |                          |                                                           |                                                                                     |
| <b>[UNI]</b><br>120-277V 50/60Hz                                      |                                                                  |                               |                          |                                                           |                                                                                     |
| <b>Luminaire body options</b>                                         |                                                                  |                               |                          |                                                           |                                                                                     |
| <b>[DPC]</b><br>Double powder<br>coating                              |                                                                  |                               |                          |                                                           |                                                                                     |