
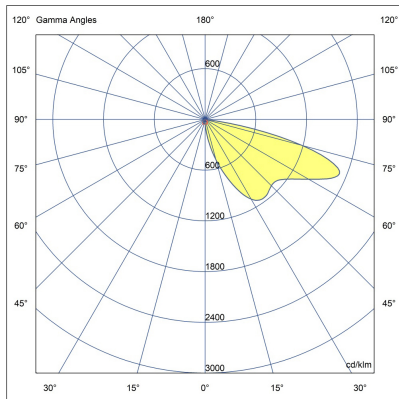


LW6048.575-EN-SLFW-350-840-ONOFF-EN-C1

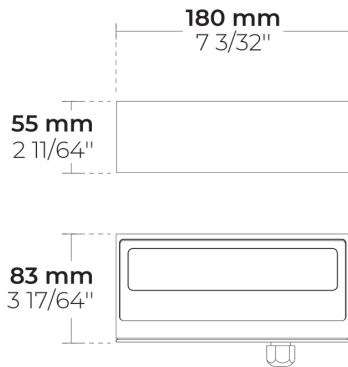

[SLFW]
Special linear,
Forward throw

Variant

Light distribution	[SLFW] 111x53°
Delivered lumens flux	1068 lm
Rated input power	10 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	106 lm/W
Lamp	4 LED
BUG rating	B0-U0-G1
Lifetime L90B50 (hour)	>42,000
Lifetime L80B50 (hour)	>42,000

Options

Technical information

Mounting	Surface or wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	1.1 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable
Packing box dimensions	11*20*7 cm

Accessories (To be ordered separately)

Mounting accessories



**DALI driver within
an IP67 box for
DOGO**

007502840

Project name		Type		Quantity	
Date		Note			
LW6048.575-EN-SLFW-350-840-ONOFF-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[SLFW] Special linear, Forward throw - 111x53°	[350] 10 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[HM1] Black	
	[700] 20 W	[822] 2200 K CRI 80		[HM2] Dark grey	
		[827] 2700 K CRI 80		[HM3] Anthracite grey	
		[830] 3000 K CRI 80		[HM4] Light grey	
		[740] 4000 K CRI 70		[HM5] White	
				[HM6] Bronze	
		[CC] Custom colour (Please specify RAL code)			
Extras	Accessories (<i>To be ordered separately</i>)				
Mounting options	Mounting accessories				
[ESMA] Extra surface mounting adaptor for a flat wall	[007502840] DALI driver within an IP67 box for DOGO				
Consult the factory					
[UNI] 120-277V 50/60Hz					
Luminaire body options					
[DPC] Double powder coating					