



DRAGO 8 LED

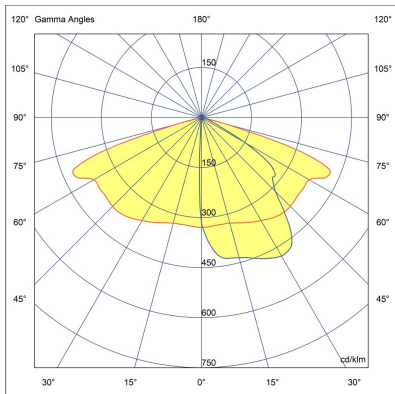

LB6048.910-EN-T3-350-827

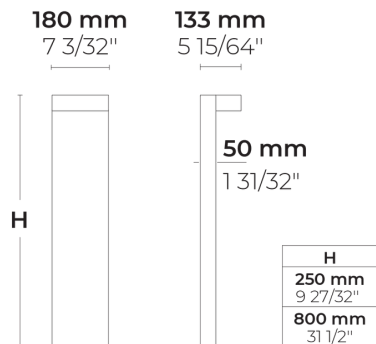

[T3]
Type III

Configuration

Light distribution	[T3] 144x57°
Delivered lumens flux	709 lm
Rated input power	9.5 W
Color temperature	2700 K CRI 80
Luminaire efficacy	74 lm/W
Lamp	8 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000


Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	3.53 kg (0.25 m), 4.5 kg (0.8 m)
Driver	Internal LED driver
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord
Packing box dimensions	15*20*30 cm (0.25 m), 15*20*85 cm (0.8 m)
Notes	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.

Accessories (To be ordered separately)

Anchor bolts



628I000

628I000

Project name				Type		Quantity	
Date		Note					
LB6048.910-EN-T3-350-827-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[T3] Type III - 144x57°	[350] 9.5 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1] Black
		[830] 3000 K CRI 80	[DALI] DALI	[HM2] Dark gray
		[740] 4000 K CRI 70		[HM3] Anthracite gray
		[840] 4000 K CRI 80		[HM4] Light gray
				[HM5] White
				[HM6] Bronze
				[CC] Custom color (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H0.25] 0.8'	Consult the factory	Anchor bolts		
[H0.80] 2.6'	[EK] Emergency kit	[628I000] 628I000		
[HC]	[MS] Motion sensor			
	Luminaire body options			
	[DPC] Double powder coating			