



# DRAGO 8 LED

CE UK CA IK08 IP65

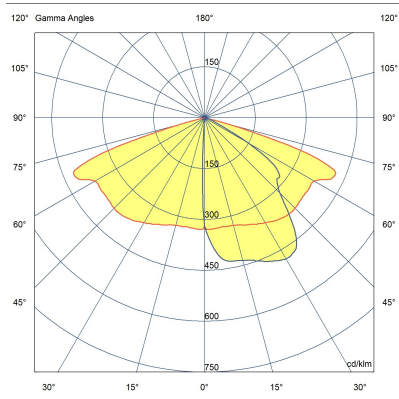

LB6048.910-EN-T3-350-830-EN-C1

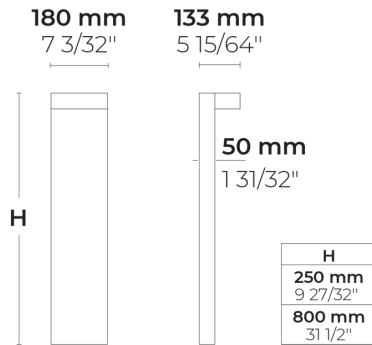

[T3]

Type III, Asymmetric,  
Side throw

## Variant

Light distribution	[T3] 144x57°
Delivered lumens flux	709 lm
Rated input power	9.5 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	74 lm/W
Lamp	8 LED
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

## Options

## Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	3.53 kg (0.25 m), 4.5 kg (0.8 m)
Driver	Internal LED driver
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable
Packing box dimensions	15*20*30 cm (0.25 m), 15*20*85 cm (0.8 m)
Notes	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.


HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 28.04.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

# Accessories (To be ordered separately)








## Anchorage



628I000

628I000

Project name		Type		Quantity	
Date		Note			
LB6048.910-EN-T3-350-830-__-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[T3]</b> Type III, Asymmetric, Side throw - 144x57°	<b>[350]</b> 9.5 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
		<b>[827]</b> 2700 K CRI 80	<b>[DALI]</b> DALI	<b>[HM2]</b>  Dark grey
		<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b>  Anthracite grey
		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b>  Light grey
				<b>[HM5]</b>  White
				<b>[HM6]</b>  Bronze
				<b>[CC]</b>  Custom colour (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
<b>[H0.25]</b> 25cm  <b>[H0.80]</b> 80cm  <b>[HC]</b>	<b>Consult the factory</b>	<b>Anchorage</b>		
	<b>[EK]</b> Emergency kit	<b>[628I000]</b> 628I000		
	<b>[MS]</b> Motion sensor			
	<b>Luminaire body options</b>			
	<b>[DPC]</b> Double powder coating			