



# URBAN UNITS V3 Top Module, 360°, 3 Module

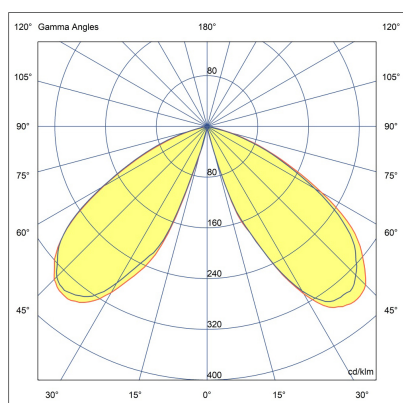

LP4054.846-EN-SYM-1050-827

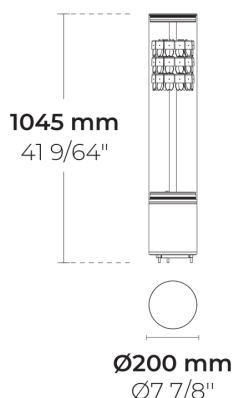

[SYM]  
Symmetric

## Configuration

<b>Light distribution</b>	[SYM] 118°
<b>Delivered lumens flux</b>	6140 lm
<b>Rated input power</b>	78 W
<b>Color temperature</b>	2700 K CRI 80
<b>Luminaire efficacy</b>	78 lm/W
<b>Lamp</b>	36 LED
<b>Color Deviation</b>	3 SDCM
<b>Lifetime L90 (hour)</b>	>60,000
<b>Lifetime L80 (hour)</b>	>60,000

## Options

## Technical information

<b>Housing</b>	Corrosion resistant, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Lens / Reflector</b>	High reflectance aluminium coating, multifaceted micro reflector
<b>Glass / Diffusor</b>	UV stable, bio-based polycarbonate diffusor
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	15.2 kg
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	10/6 kV
<b>Power factor</b>	> 0.93
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	8" of flexible power cord

# Poles (Included)








---

## Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFC.C01.T001-H3	10'	Ø 7 7/8"	
PAFC.C01.T001-H4	13.1'	Ø 7 7/8"	
PAFC.C01.T001-H5	16.4'	Ø 7 7/8"	

Project name				Type		Quantity	
Date		Note					
LP4054.846-EN-SYM-1050-827-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SYM]</b> Symmetric - 118°	<b>[1050]</b> 78 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
		<b>[830]</b> 3000 K CRI 80	<b>[DALI]</b> DALI	<b>[HM2]</b>  Dark gray
		<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b>  Anthracite gray
		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b>  Light gray
				<b>[HM5]</b>  White
				<b>[HM6]</b>  Bronze
				<b>[CC]</b>  Custom color (Please specify RAL code)
Extras				
Consult the factory				
<b>[UNI]</b> 120-277V 50/60Hz				
Luminaire body options				
<b>[DPC]</b> Double powder coating				