



# URBAN UNITS Adjustable Floodlight Module

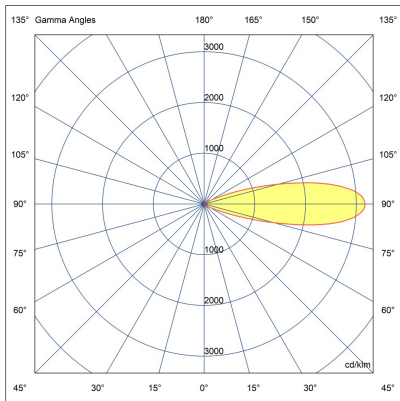

LP4053.695-EN-N-700-840

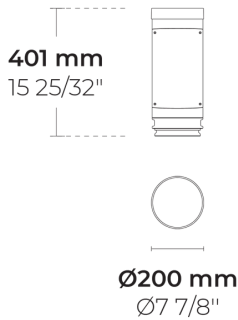

[N]

Narrow - NEMA Type 2

## Configuration

Light distribution	[N] 26°
Delivered lumens flux	3810 lm
Rated input power	35 W
Color temperature	4000 K CRI 80
Luminaire efficacy	95 lm/W
Lamp	4 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

## Options

## Technical information

Tilt angle	+30°/-30°
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	5.55 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	8" of flexible power cord
Notes	Tilt angle adjustment of the module must be done in the factory environment and by the technical team. Please let your sales representative know about the angle degree information.

# Poles (Included)

---

## Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFC.C01.T001-H3	10'	Ø7 7/8"	
PAFC.C01.T001-H4	13.1'	Ø7 7/8"	
PAFC.C01.T001-H5	16.4'	Ø7 7/8"	

Project name				Type		Quantity	
Date		Note					
LP4053.695-EN-N-700-840-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[N]</b> Narrow - NEMA Type 2 - 26°	<b>[700]</b> 35 W	<b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black
<b>[S]</b> Spot - NEMA Type 0 - 7°		<b>[827]</b> 2700 K CRI 80	<b>[DALI]</b> DALI	<b>[HM2]</b> Dark gray
		<b>[830]</b> 3000 K CRI 80	<b>[AUTO]</b> AutoDIM	<b>[HM3]</b> Anthracite gray
		<b>[740]</b> 4000 K CRI 70	<b>[STEP]</b> StepDIM	<b>[HM4]</b> Light gray
				<b>[HM5]</b> White
				<b>[HM6]</b> Bronze
				<b>[CC]</b> Custom color (Please specify RAL code)
Extras				
Consult the factory				
<b>[UNI]</b> 120-277V 50/60Hz				
<b>Luminaire body options</b>				
<b>[DPC]</b> Double powder coating				