



# URBAN UNITS Street Lighting Module

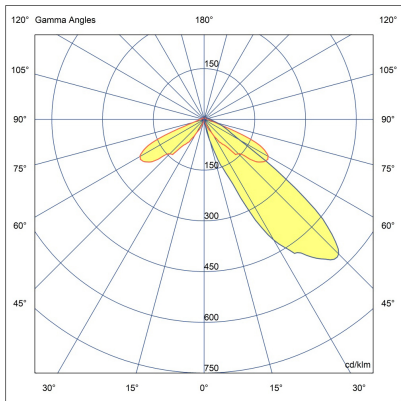

LP4053.514-US-T2-700-740



[T2]  
Type II

## Configuration

Light distribution	[T2] 137x28°
Delivered lumens flux	3488 lm
Rated input power	40 W
Color temperature	4000 K CRI 70
Luminaire efficacy	87 lm/W
Lamp	16 LED
Color Deviation	4 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

## Options

## Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	12 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	8" of flexible power cord








# Poles (Included)

## Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFC.C01.T001-H3	10'	Ø 7 7/8"	
PAFC.C01.T001-H4	13.1'	Ø 7 7/8"	
PAFC.C01.T001-H5	16.4'	Ø 7 7/8"	

Project name					Type		Quantity	
Date		Note						
LP4053.514-US-T2-700-740-__ - __								

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[T2]</b> Type II - 137x28°	<b>[700]</b> 40 W	<b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
		<b>[827]</b> 2700 K CRI 80	<b>[0-10V]</b> 0-10V	<b>[HM2]</b>  Dark gray
		<b>[830]</b> 3000 K CRI 80		<b>[HM3]</b>  Anthracite gray
		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b>  Light gray
				<b>[HM5]</b>  White
				<b>[HM6]</b>  Bronze
				<b>[CC]</b>  Custom color (Please specify RAL code)