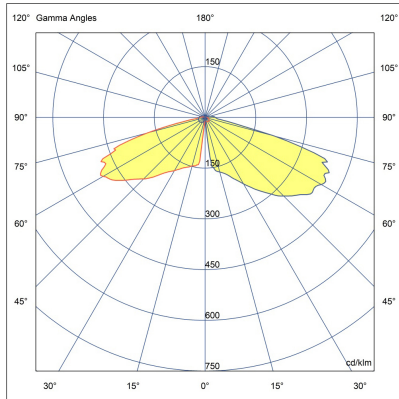
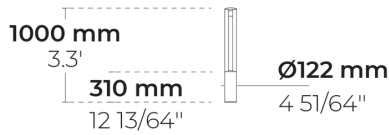


LB6051.693-EN-SYM-3L-350-830-EN-C1

**[SYM-3L]**Symmetric, Special  
effect: 3 lines

### Variant

<b>Light distribution</b>	[SYM-3L] 38x117°
<b>Delivered lumens flux</b>	234 lm
<b>Rated input power</b>	6.5 W
<b>Colour temperature</b>	3000 K CRI 80
<b>Luminaire efficacy</b>	46 lm/W
<b>Lamp</b>	1 LED
<b>MacAdam Ellipse</b>	4 SDCM
<b>Lifetime L90B50 (hour)</b>	>72,600
<b>Lifetime L80B50 (hour)</b>	>72,600


### Options

### Technical information

<b>Mounting</b>	Surface mountable
<b>Housing</b>	Corrosion resistant, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Liquid silicone
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK05
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	3.6 kg
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	1/1 kV
<b>Power factor</b>	> 0.91
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-25...50°C
<b>Cable</b>	0.5 m of flexible cable








# Accessories (To be ordered separately)

## Anchorage



628I002  
628I002

Project name		Type		Quantity	
Date		Note			
LB6051.693-EN-SYM-3L-350-830-__-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	[350] 6.5 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black 
	[700] 10 W	[827] 2700 K CRI 80  [740] 4000 K CRI 70  [840] 4000 K CRI 80	[DALI] DALI	[HM2] Dark grey   [HM3] Anthracite grey   [HM4] Light grey   [HM5] White   [HM6] Bronze   [CC]  Custom colour (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
[H1] 1m  [HC]	Consult the factory	Anchorage		
	[UNI] 120-277V 50/60Hz	[628I002] 628I002		
	Luminaire body options			
	[DPC] Double powder coating			