



VERTEX 1 Module

CE UK CA IK08 IP66

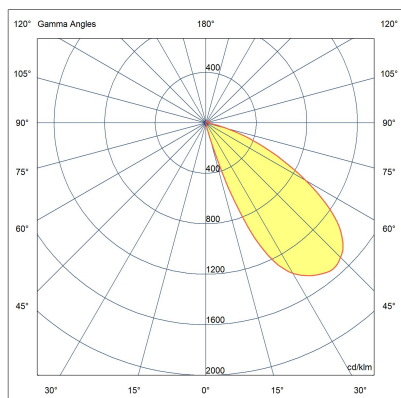

LB6064.591-EN-SLFB-350-827-EN-C1

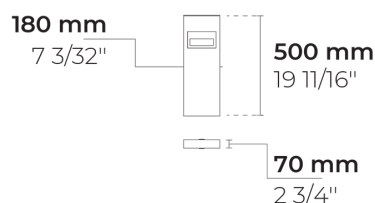

[SLFB]
Special linear,
Forward throw

Variant

Light distribution	[SLFB] 144x41°
Delivered lumens flux	423 lm
Rated input power	8 W
Colour temperature	2700 K CRI 80
Luminaire efficacy	52 lm/W
Lamp	6 LED
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000


Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	4.51 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.5 m of flexible cable

Accessories (To be ordered separately)

Anchorage



628I005

628I005

Project name		Type		Quantity	
Date		Note			
LB6064.591-EN-SLFB-350-827-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLFB] Special linear, Forward throw - 144x41°	[350] 8 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1] Black
		[830] 3000 K CRI 80	[DALI] DALI	[HM2] Dark grey
		[740] 4000 K CRI 70		[HM3] Anthracite grey
		[840] 4000 K CRI 80		[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] Custom colour (Please specify RAL code)
				[WD] Wooden
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H0.50] 50cm [HC]	Luminaire body options	Anchorages		
	[DPC] Double powder coating	[628I005] 628I005		