



VERTEX 6 Module

CE UK CA IK08 IP66

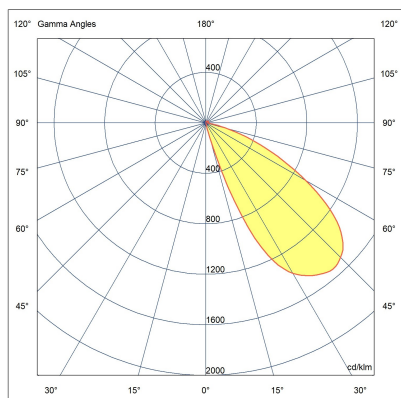

LB6064.596-EN-SLFB-350-827-EN-C1

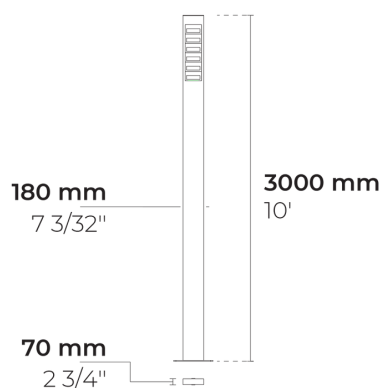

[SLFB]

Special linear,
Forward throw

Variant

Light distribution	[SLFB] 144x41°
Delivered lumens flux	2538 lm
Rated input power	45 W
Colour temperature	2700 K CRI 80
Lamp	36 LED
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000


Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	22.5 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.5 m of flexible cable

Accessories (To be ordered separately)

Anchorage



625J013

625J013

Project name		Type		Quantity	
Date		Note			
LB6064.596-EN-SLFB-350-827-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLFB] Special linear, Forward throw - 144x41°	[350] 45 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1] Black 
		[830] 3000 K CRI 80	[DALI] DALI	[HM2] Dark grey 
		[840] 4000 K CRI 80		[HM3] Anthracite grey 
				[HM4] Light grey 
				[HM5] White 
				[HM6] Bronze 
				[CC] Custom colour (Please specify RAL code) 
				[WD] Wooden 
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Anchorage			
[UNI] 120-277V 50/60Hz	[625]013 625J013			
Luminaire body options				
[DPC] Double powder coating				