




MINIMO 2x120°

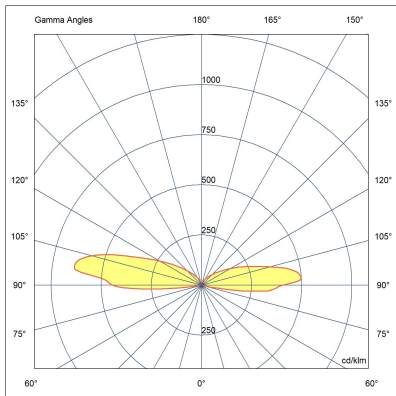

LR9015.515-2x120-EN-C2-350-740-ONOFF

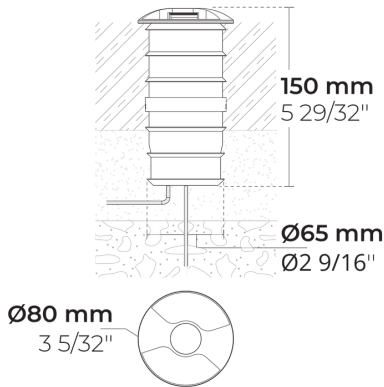

[C2-120]

Controlled, 2 sides,
2x120°

HEPER USA LLC
W227 N546 Westmound Drive Waukesha, 53186
Wisconsin, United States
+1 312 910 9740
infoUS@hepergroup.com

Configuration

Light distribution	[C2-120] 240x50°
Delivered lumens flux	18 lm
Rated input power	1.7 W
Color temperature	4000 K CRI 70
Luminaire efficacy	10 lm/W
Lamp	1 LED
Color Deviation	4 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

Options


Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	0.6 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.60
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheathed power cord

We reserve the right to change specifications without prior written notice. Edition: 20.05.2024. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (Included)

Mounting accessories



Junction Box for
MINIMO-MINIKA

141901034

Mounting accessories




Plastic case for
MINIMO/MINIKA

160401101

Accessories (To be ordered separately)

Mounting accessories



Connector set - 5-
pole

141407400

Project name					Type		Quantity	
Date			Note					
LR9015.515-2x120-EN-C2-350-740-ONOFF-__-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
[C2-120] Controlled, 2 sides, 2x120° - 240x50° [I] - 240x50°	[350] 1.7 W	[740] 4000 K CRI 70 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Extras	Accessories <i>(Included)</i>	Accessories <i>(To be ordered separately)</i>		
Consult the factory	Mounting accessories	Mounting accessories		
[UNI] 120-277V 50/60Hz Luminaire body options	[141901034] Junction Box for MINIMO-MINIKA [160401101] Plastic case for MINIMO/MINIKA	[141407400] Connector set - 5-pole		
[SS] Stainless steel housing				