




# MINIMO 2x120°

CE UK CA IK10 IP67

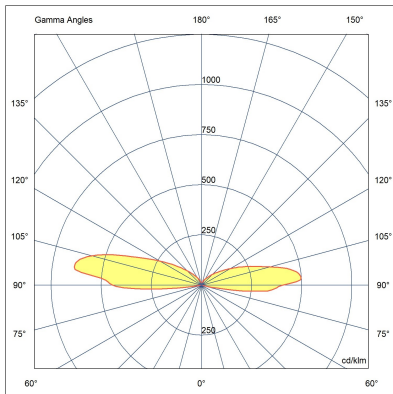

LR9015.515-2x120-EN-C2-350-840-ONOFF-EN-C1

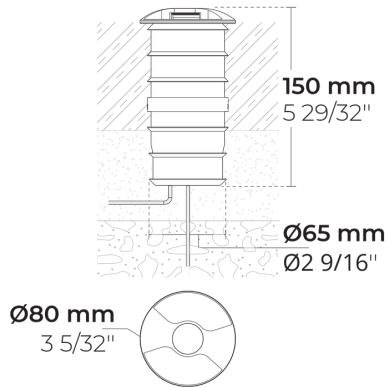

[C2-120]

Controlled, 2 sides,  
2x120°

## Variant

|                        |                  |
|------------------------|------------------|
| Light distribution     | [C2-120] 240x50° |
| Delivered lumens flux  | 15 lm            |
| Rated input power      | 1.7 W            |
| Colour temperature     | 4000 K CRI 80    |
| Luminaire efficacy     | 8 lm/W           |
| Lamp                   | 1 LED            |
| MacAdam Ellipse        | 4 SDCM           |
| Lifetime L90B50 (hour) | >102,000         |
| Lifetime L80B50 (hour) | >102,000         |


## Options

## Technical information

|                         |   |
|-------------------------|---|
| Mounting                | Ground recessed mountable   |
| Housing                 | Corrosion resistant, marine grade aluminum housing                        |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone rubber   |
| Lens / Reflector        | PMMA lens with high optical efficiency                                    |
| Glass / Diffusor        | Custom Design PMMA Diffusor   |
| Impact protection       | IK10  |
| Ingress protection      | IP67  |
| Input voltage           | 220-240V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 0.6 kg  |
| LED module              | High power LEDs on metal-core PCB   |
| Driver                  | Internal LED driver   |
| Driver surge protection | 1/1 kV  |
| Power factor            | > 0.60  |
| Through wiring          | Single cable entry  |
| Operating temperature   | -40...50°C  |
| Cable                   | 0.3 m of rubber-sheathed cable  |

## Accessories (Included)

Mounting accessories



**Junction Box for  
MINIMO-MINIKA**

141901034

Mounting accessories




**Plastic case for  
MINIMO/MINIKA**

160401101

## Accessories (To be ordered separately)









Mounting accessories



**Connector set - 5-  
pole**

141407400

|   |  |      |  |          |  |
|---|--|------|--|----------|--|
| Project name  |  | Type |  | Quantity |  |
| Date  |  | Note |  |          |  |
| LR9015.515-2x120-EN-C2-350-840-ONOFF-EN-C1-__-__-__ |  |      |  |          |  |

| Light distribution  | Rated input power  | Colour temperature   | Control                  | Product colours   |
|---|--|--|--------------------------|---|
| <b>[C2-120]</b><br>Controlled, 2 sides,<br>2x120° - 240x50°<br><br><br>- 240x50° | <b>[350]</b><br>1.7 W  | <b>[840]</b><br>4000 K CRI 80<br><br><b>[827]</b><br>2700 K CRI 80<br><br><b>[830]</b><br>3000 K CRI 80<br><br><b>[740]</b><br>4000 K CRI 70 | <b>[ONOFF]</b><br>On/Off | <b>[HM1]</b>  Black<br><br><b>[HM2]</b>  Dark grey<br><br><b>[HM3]</b>  Anthracite grey<br><br><b>[HM4]</b>  Light grey<br><br><b>[HM5]</b>  White<br><br><b>[HM6]</b>  Bronze<br><br><b>[CC]</b>  Custom colour (Please specify RAL code) |
| <b>Extras</b>   | <b>Accessories</b><br><i>(Included)</i>  | <b>Accessories</b> <i>(To be ordered separately)</i>   |                          |   |
| <b>Consult the factory</b>  | <b>Mounting accessories</b>  | <b>Mounting accessories</b>  |                          |   |
| <b>[UNI]</b><br>120-277V 50/60Hz<br><br><b>Luminaire body options</b><br><br><b>[SS]</b><br>Stainless steel housing   | <b>[141901034]</b><br>Junction Box for MINIMO-MINIKA<br><br><b>[160401101]</b><br>Plastic case for MINIMO/MINIKA | <b>[141407400]</b><br>Connector set - 5-pole   |                          |   |