



# MINIMO 4x90°

CE UK CA IK10 IP67

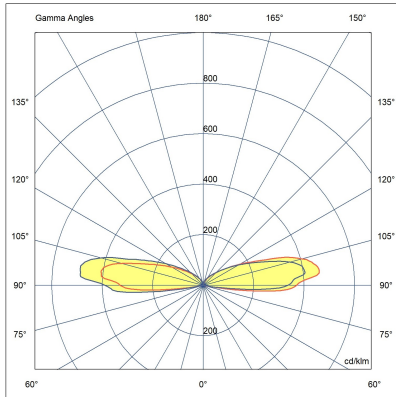

LR9015.515-4x90-EN-C4-350-740-ONOFF-EN-C1

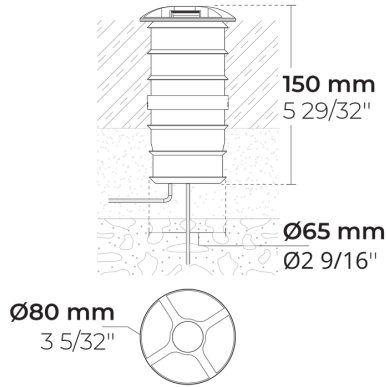

[C4-90]

Controlled, 4 sides,  
4x90°

## Variant

Light distribution	[C4-90] 360x50°
Delivered lumens flux	20 lm
Rated input power	1.7 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	11 lm/W
Lamp	1 LED
MacAdam Ellipse	4 SDCM
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000


## Options

## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	0.6 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.60
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.3 m of rubber-sheathed cable

## Accessories (Included)

Mounting accessories



**Junction Box for  
MINIMO-MINIKA**

141901034

Mounting accessories




**Plastic case for  
MINIMO/MINIKA**

160401101

## Accessories (To be ordered separately)








Mounting accessories



**Connector set - 5-  
pole**

141407400

Project name		Type		Quantity	
Date		Note			
LR9015.515-4x90-EN-C4-350-740-ONOFF-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[C4-90]</b> Controlled, 4 sides, 4x90° - 360x50°	<b>[350]</b> 1.7 W	<b>[740]</b> 4000 K CRI 70  <b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black  <b>[HM2]</b>  Dark grey  <b>[HM3]</b>  Anthracite grey  <b>[HM4]</b>  Light grey  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom colour (Please specify RAL code)
<b>Extras</b>	<b>Accessories</b> <i>(Included)</i>	<b>Accessories</b> <i>(To be ordered separately)</i>		
<b>Consult the factory</b>	<b>Mounting accessories</b>	<b>Mounting accessories</b>		
<b>[UNI]</b> 120-277V 50/60Hz	<b>[141901034]</b> Junction Box for MINIMO-MINIKA	<b>[141407400]</b> Connector set - 5-pole		
<b>Luminaire body options</b>	<b>[160401101]</b> Plastic case for MINIMO/MINIKA			
<b>[SS]</b> Stainless steel housing				