




MINIMO 120°

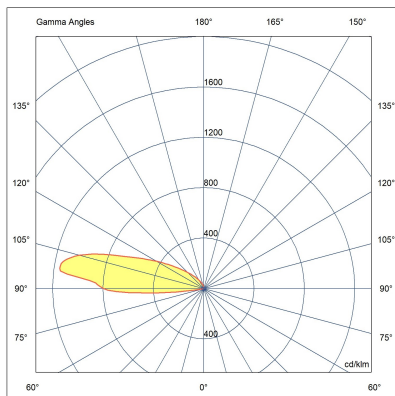

LR9015.515-120-US-C1-350-740-ONOFF

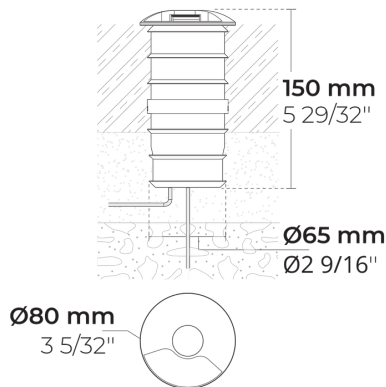

[C1-120]

Controlled, 1 side,
120°

Configuration

Light distribution	[C1-120] 120x38°
Delivered lumens flux	10 lm
Rated input power	1.7 W
Color temperature	4000 K CRI 70
Luminaire efficacy	5 lm/W
Lamp	1 LED
Color Deviation	4 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000


Options

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	1 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheathed power cord

Accessories (Included)

Mounting accessories Mounting accessories



Connector set - 5-pole

141407400



Plastic case for MINIMO/MINIKA

160401101

Project name				Type		Quantity	
Date		Note					
LR9015.515-120-US-C1-350-740-ONOFF-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[C1-120] Controlled, 1 side, 120° - 120x38°	[350] 1.7 W	[740] 4000 K CRI 70 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Accessories <i>(Included)</i>				
Mounting accessories				
[141407400] Connector set - 5-pole [160401101] Plastic case for MINIMO/MINIKA				