




MINIMO 2x120°

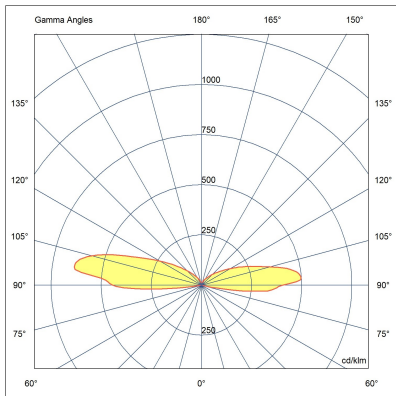

LR9015.515-2x120-US-C2-350-840-ONOFF

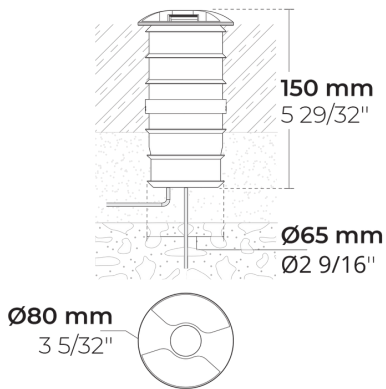

[C2-120]

Controlled, 2 sides,
2x120°

Configuration

| | |
|-----------------------|------------------|
| Light distribution | [C2-120] 240x50° |
| Delivered lumens flux | 15 lm |
| Rated input power | 1.7 W |
| Color temperature | 4000 K CRI 80 |
| Luminaire efficacy | 8 lm/W |
| Lamp | 1 LED |
| Color Deviation | 4 SDCM |
| Lifetime L90 (hour) | >102,000 |
| Lifetime L80 (hour) | >102,000 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Ground recessed mountable |
| Housing | Corrosion resistant stainless steel housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone rubber |
| Lens / Reflector | PMMA lens with high optical efficiency |
| Glass / Diffusor | Custom Design PMMA Diffusor |
| Impact protection | IK10 |
| Ingress protection | IP67 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 1 lbs |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 3/3 kV |
| Power factor | > 0.40 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 12" of rubber-sheathed power cord |


Accessories (Included)

Mounting accessories Mounting accessories



Connector set - 5-pole








141407400



Plastic case for MINIMO/MINIKA

160401101

| | | | | | | | | |
|---|--|--|------|--|------|--|----------|--|
| Project name | | | | | Type | | Quantity | |
| Date | | | Note | | | | | |
| LR9015.515-2x120-US-C2-350-840-ONOFF-__ | | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors | |
|---|-----------------------|-------------------------------|--------------------------|---|---|
| [C2-120] Controlled, 2 sides, 2x120° - 240x50° | [350] 1.7 W | [840] 4000 K CRI 80 | [ONOFF] On/Off | [HM1] Black |  |
| | | [827] 2700 K CRI 80 | | [HM2] Dark gray |  |
| | | [830] 3000 K CRI 80 | | [HM3] Anthracite gray |  |
| | | [740] 4000 K CRI 70 | | [HM4] Light gray |  |
| | | | | [HM5] White |  |
| | | | | [HM6] Bronze |  |
| | | | | [CC] Custom color (Please specify RAL code) |  |
| Accessories <i>(Included)</i> | | | | | |
| Mounting accessories | | | | | |
| [141407400] Connector set - 5-pole | | | | | |
| [160401101] Plastic case for MINIMO/MINIKA | | | | | |