



MINIMO 4x90°

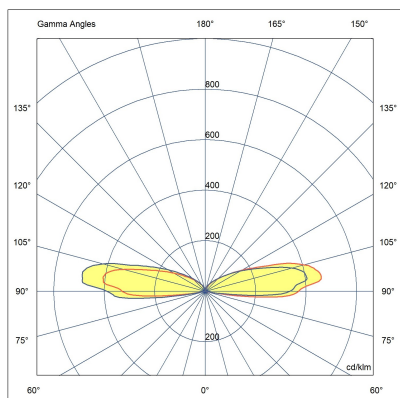

LR9015.515-4x90-US-C4-350-740-ONOFF

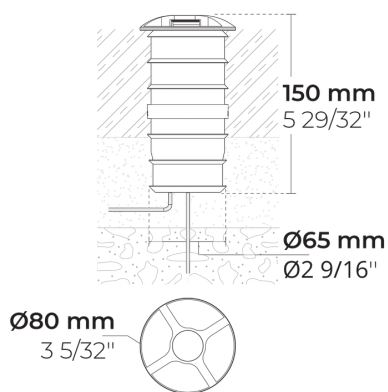

[C4-90]

Controlled, 4 sides,
4x90°

Configuration

Light distribution	[C4-90] 360x50°
Delivered lumens flux	20 lm
Rated input power	1.7 W
Color temperature	4000 K CRI 70
Luminaire efficacy	11 lm/W
Lamp	1 LED
Color Deviation	4 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

Options

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	1 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheathed power cord


Accessories (Included)

Mounting accessories Mounting accessories



Connector set - 5-pole








141407400



Plastic case for MINIMO/MINIKA

160401101

Project name						Type		Quantity	
Date			Note						
LR9015.515-4x90-US-C4-350-740-ONOFF-__									

Light distribution	Rated input power	Color temperature	Control	Product colors	
[C4-90] Controlled, 4 sides, 4x90° - 360x50°	[350] 1.7 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black	
		[827] 2700 K CRI 80		[HM2] Dark gray	
		[830] 3000 K CRI 80		[HM3] Anthracite gray	
		[840] 4000 K CRI 80		[HM4] Light gray	
				[HM5] White	
				[HM6] Bronze	
				[CC] Custom color (Please specify RAL code)	
Accessories <i>(Included)</i>					
Mounting accessories					
[141407400] Connector set - 5-pole					
[160401101] Plastic case for MINIMO/MINIKA					