



# MINIKA 90°

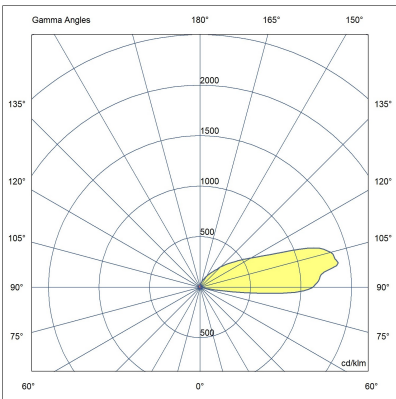

LR9014.515-90-US-C1-350-827-ONOFF

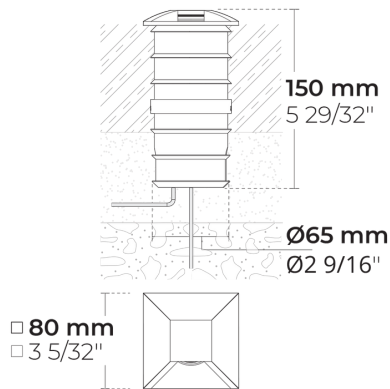

[C1-90]

Controlled, 1 side,  
90°

## Configuration

Light distribution	[C1-90] 90x50°
Delivered lumens flux	7 lm
Rated input power	1.7 W
Color temperature	2700 K CRI 80
Luminaire efficacy	4 lm/W
Lamp	1 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

## Options


## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	1.45 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheathed power cord

## Accessories (Included)

---








### Mounting accessories



### Connector set - 5-pole

141407400

Project name						Type		Quantity	
Date			Note						
LR9014.515-90-US-C1-350-827-ONOFF-__									

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[C1-90]</b> Controlled, 1 side, 90° - 90x50°	<b>[350]</b> 1.7 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black 
		<b>[830]</b> 3000 K CRI 80		<b>[HM2]</b> Dark gray 
		<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b> Anthracite gray 
		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b> Light gray 
				<b>[HM5]</b> White 
				<b>[HM6]</b> Bronze 
				<b>[CC]</b>  Custom color (Please specify RAL code)
<b>Accessories</b> <i>(Included)</i>				
<b>Mounting accessories</b>				
<b>[141407400]</b> Connector set - 5-pole				