



PINA Flood

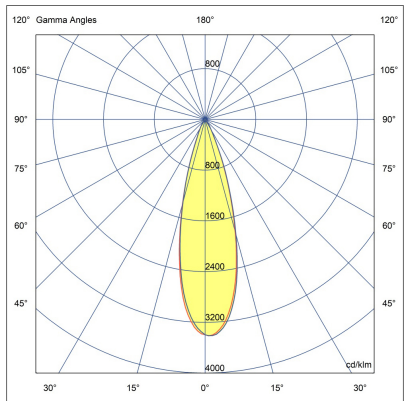

LF8033.003-EN-N-927-ONOFF

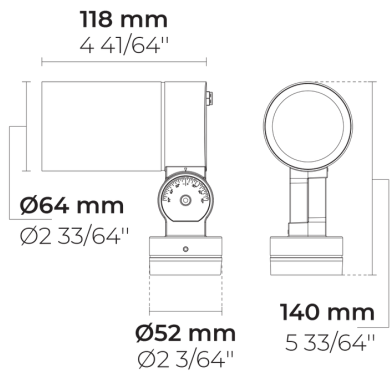

[N]

Narrow - NEMA Type 2

Configuration

Light distribution	[N] 25°
Delivered lumens flux	368 lm
Rated input power	7.5 W
Color temperature	2700 K CRI 90
Luminaire efficacy	49 lm/W
Lamp	1 LAMP
Color Deviation	5 SDCM

Options

Technical information

Mounting	Pedestal knuckle mount (standard), stake mount (optional)
Tilt angle	+90°/-80°
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK06
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.01 m ²
Weight	0.43 kg
Driver	Internal LED driver
Power factor	> 0.80
Through wiring	Single power cord entry
Power cord	16" of flexible power cord

Accessories (To be ordered separately)

Mounting accessories



Spike

160405040

Project name				Type		Quantity	
Date		Note					

LF8033.003-EN-N-927-ONOFF-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
<div>[N]</div> Narrow - NEMA Type 2 - 25°	<div>[I]</div> 7.5 W	<div>[927]</div> 2700 K CRI 90	<div>[ONOFF]</div> On/Off	<div>[HM1]</div> Black
<div>[VN]</div> Very narrow - NEMA Type 1 - 10°		<div>[930]</div> 3000 K CRI 90		<div>[HM2]</div> Dark gray
<div>[MN]</div> Medium narrow - NEMA Type 3 - 36°		<div>[940]</div> 4000 K CRI 90		<div>[HM3]</div> Anthracite gray
<div>[M]</div> Medium - NEMA Type 4 - 60°				<div>[HM4]</div> Light gray
				<div>[HM5]</div> White
				<div>[HM6]</div> Bronze
				<div>[CC]</div> Custom color (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Mounting accessories			
<div>[UNI]</div> 120-277V 50/60Hz	<div>[160405040]</div> Spike			